



BNC — 50 Ohm

BNC 50 Ohm


MALE



LETTER	INCHES [MILLIMETERS]	
	MINIMUM	MAXIMUM
A	.385 [9.78]	.390 [9.91]
B	FLARED TO MEET ELECTRICAL & MECHANICAL REQUIREMENTS	
C	.190 [4.83]	—
D	.052 [1.32]	.054 [1.37]
E	5.33 [210]	.230 [5.84]
F	.006 [1.5]	.018 [4.6]
L	.003 [1.08]	.040 [1.02]
N	—	.025 [6.4]
P	.208 [5.28]	.228 [5.79]
Q	.078 [1.98]	—
R	.081 [2.06]	.087 [2.21]



FEMALE

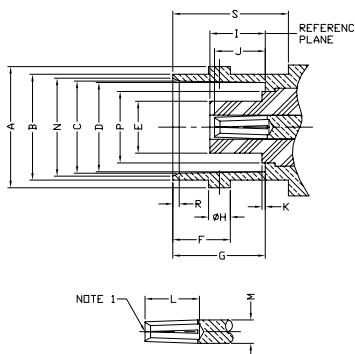

LETTER	INCHES [MILLIMETERS]	
	MINIMUM	MAXIMUM
A	.432 [10.97]	.436 [11.07]
B	.375 [9.60]	.382 [9.70]
C	.327 [8.31]	.333 [8.46]
D	.319 [8.10]	.321 [8.15]
E	—	.186 [4.72]
F	.204 [5.18]	.208 [5.28]
G	.327 [8.31]	.335 [8.51]
H	.075 [1.91]	.081 [2.06]
I	.188 [4.78]	.208 [5.28]
J	.186 [4.72]	.206 [5.23]
K	—	.006 [1.5]
L	.195 [4.95]	—
M	.081 [2.06]	.087 [2.21]
N	.346 [8.79]	.356 [9.04]
P	—	.256 [6.50]
R	.015 [3.8]	.030 [7.6]
S	.414 [10.52]	—

NOTE 1: I.D. TO MEET VSWR AND CONTACT RESISTANCE WHEN MATED WITH .052/.054 DIA. PIN

SPECIFICATIONS

ELECTRICAL SPECIFICATIONS

IMPEDANCE: 50 Ω

WORKING VOLTAGE RATING: 500 VRMS @ SEA LEVEL

FREQUENCY RANGE: 0-4 GHz

MECHANICAL SPECIFICATIONS

MATING: 2-STUD BAYONET LOCK COUPLING

INTERFACE: MIL-STD-348, SECTION 301

CABLING: CLAMP, SOLDERLESS CLAMP, CRIMP AND TWIST ON

PLATING

G - GOLD

N - NICKEL

S - SILVER

SS - STAINLESS STEEL

TP - THERMOPLASTIC

DIELECTRIC MATERIAL

D - DELRIN

PP - POLYPROPYLENE

T - TEFLON

TP - THERMOPLASTIC

CABLE GROUPS

GRP FOR THESE CABLE TYPES

B	TIMES LMR-100A; RG-174, 188, 188A, 316/U; ALPHA 9174, 9316; BELDEN 7805A, 8216, 83269, 83284, 84316; COMMScope AMC-174, WBC-100
B1	RG-316/U DOUBLE SHIELD; RD-316; BELDEN 83269; COLEMAN 1596
C	TIMES LMR-195; RG-58, 58A, 58C, 141, 141A/U; ANDREW CNT-195, CNT-195-DB, CNT-195-FR; BELDEN 7806A, 8219, 8240, 8259, 8262, 9201, 9203, 9310, 9311; COMMScope WBC-195, WBC-195R, 0268, TCOM-195, TCOM-195-FR; HARBOUR HPF195
C1	RG-55, 55A, 55B, 142, 142A, 142B, 223, 400/U; ALPHA 9055, 9055B, 9223; BELDEN 7806A, 83242, 84142
C2	TIMES LMR-200, MSI-22; ALPHA 9848; BELDEN 7807A; COMMScope AMC-58LL, WBC-200, WBC-200R, TCOM-200, TCOM-200-FR; HARBOUR HPF200
E	RG-8, 8A, 213/U; ALPHA 9008, 9213; BELDEN 8267, 9251, 9880, 89880; INTERCOMP 4082, 22132; TIMES AA-4478
I	RG-8/U TYPE; BELDEN 9913; COMMScope BWC-400, BWC-400R, CUSHCRAFT ULTRALINK TL93605; TIMES AA-5886, AA-6146, LMR-400, LMR-400 ULTRAFLEX; T-COM-400
M	RG-122/U; BELDEN 82907, 88240, 89907; MOTOROLA WHITE TEFLON; TIMES MSI-15
P	ANTENNA SPECIALIST K214, PRO-FLEX 800; TIMES AA-3096
PL	BELDEN 89913
X	RG-8X; BELDEN 9258; COMMScope BWC-240, BWC-240R; MICRO 8/U; REMEE 1600; SAXTON 8315; TIMES LMR-240, LMR-240 ULTRAFLEX



FIG. 1
RFB-1100-2, -2ST, -B,
-C2ST, RFB-1101-1X



FIG. 2
RFB-1101-1EN, -1P,
-1SI, -PL



FIG. 3
RFB-1102-T



FIG. 4
RFB-1104



FIG. 5
RFB-1106-2, -2ST, -2T, -2TC1,
-C-03, C1, -C1ST, -C2, -C2ST,
-C2T, RFB-1107-1P, -1X, -7



FIG. 6
RFB-1106-5, -5B1



FIG. 7
RFB-1106-6



FIG. 8
RFB-1106-9



FIG. 9
RFS-2022



FIG. 10
RFS-2023



FIG. 11
RFB-1106-B-ST, -B1



FIG. 12
RFB-1106-I

BNC
50 ohm

PHOTOS FOR REFERENCE ONLY, SHOWN AT 100% ACTUAL SIZE.

PART #	FIG	DESCRIPTION	CBL GRP	NOTES	REPLACES OR EQUIVALENT TO	PLATING			RECOM- MENDED TOOL
						BDY	P/C	DIE	
RFB-1100-2	1	MALE CLAMP	C	FOR RG-58/U	UG-88D/U	N	G	D	RFA-4009-204
RFB-1100-2ST	1	MALE CLAMP	C, C1	FOR RG-58/U & RG-142/U	UG-88/U, C/U, D/U, E/U	S	G	T	RFA-4009-204
RFB-1100-B	1	MALE CLAMP	B	FOR RG-174/U		N	G	T	RFA-4009-204
RFB-1100-C2ST	1	MALE CLAMP	C2	FOR TIMES LMR-200		S	G	T	RFA-4009-204
RFB-1101-1EN	2	MALE CLAMP	E	FOR RG-8/U	UG-959A/U	N	G	T	RFA-4009-206
RFB-1101-1P	2	MALE CLAMP	P	FOR PROFLEX		N	G	T	RFA-4009-203
RFB-1101-1SI	2	MALE CLAMP	I	FOR BELDEN 9913 & TIMES LMR-400		S	G	T	RFA-4005-200
RFB-1101-1X	1	MALE CLAMP	X	FOR RG-8/X & TIMES LMR-240		N	G	D	
RFB-1101-PL	2	MALE CLAMP	PL	FOR BELDEN 89913 PLENUM		S	G	T	RFA-4005-200
RFB-1102-T	3	MALE SOLDERLESS CLAMP	C	FOR RG-58/U & RG-141/U		N	S	T	
RFB-1104	4	MALE TWIST-ON	C	FOR RG-58/U		N	S	D	
RFB-1106-2	5	MALE CRIMP	C	FOR RG-58/U	UG-1785/U	N	G	D	RFA-4009-206
RFB-1106-2ST	5	MALE CRIMP	C	FOR RG-58/U	UG-1785/U	S	G	T	RFA-4009-206
RFB-1106-2T	5	MALE CRIMP	C	FOR RG-58/U	UG-1785/U	N	G	T	RFA-4009-206
RFB-1106-2TC1	5	MALE CRIMP	C1	FOR RG-142/U		N	G	T	RFA-4009-206
RFB-1106-5	6	MALE CRIMP	B	LARGE FERRULE, FOR RG-174/U		N	G	T	RFA-4009-204
RFB-1106-5B1	6	MALE CRIMP	B1	LARGE FERRULE, FOR RG-316 DOUBLE SHIELD		N	G	T	RFA-4009-204
RFB-1106-6	7	MALE CRIMP	B	SMALL FERRULE, FOR RG-174/U		N	G	T	RFA-4009-204 RFA-4089
RFB-1106-9	8	MALE QUICK DISCONNECT CRIMP	C	UNIVERSAL FOR BNC, & TNC, FOR RG-58/U		N	G	D	RFA-4009-206
RFS-2022	9	BNC MALE QUICK-DISCONNECT CRIMP	C	FOR RG-58/U		N	G	T	RFA-4009-206
RFS-2023	10	BNC FEMALE QUICK-DISCONNECT CRIMP	C	FOR RG-58/U		N	G	T	RFA-4009-206
RFB-1106-B-ST	11	MALE CRIMP	B	FOR RG-174/U & RG-316/U		S	G	T	RFA-4009-204
RFB-1106-B1	11	MALE CRIMP	B1	FOR RD-174/U & RG-316/U		N	G	T	RFA-4009-204
RFB-1106-C-03	5	MALE CRIMP	C	FOR RG-58/U		N	G	D	RFA-4009-206
RFB-1106-C1	5	MALE CRIMP	C1	FOR RG-142/U		N	G	D	RFA-4009-206
RFB-1106-C1ST	5	MALE CRIMP	C1	FOR RG-142/U		S	G	T	RFA-4009-206
RFB-1106-C2	5	MALE CRIMP	C2	FOR TIMES LMR-200		N	G	T	RFA-4009-206
RFB-1106-C2ST	5	MALE CRIMP	C2	FOR TIMES LMR-200		S	G	T	RFA-4009-206
RFB-1106-C2T	5	MALE CRIMP	C2	FOR TIMES LMR-200		N	G	T	RFA-4009-206
RFB-1106-I	12	MALE CRIMP	I	FOR LMR-400/U		N	G	T	RFA-4005-300
RFB-1107-1P	5	MALE CRIMP	P	FOR PROFLEX		N	G	D	RFA-4009-203
RFB-1107-1X	5	MALE CRIMP	X	FOR RG-8/X & TIMES LMR-240		N	G	D	RFA-4009-203
RFB-1107-7	5	MALE CRIMP	C3, M	FOR MOTOROLA WHITE TEFLON, BELDEN 89907		S	G	T	RFA-4009-206



FIG. 13
RFB-1110-1, C1, C2




FIG. 14
RFB-1110-B



FIG. 15
RFB-1110-C-04



FIG. 16
RFB-1111



FIG. 17
RFB-1112-1B



FIG. 18
RFB-1112-1B-03



FIG. 19
RFB-1112-1W



FIG. 20
RFB-1112-B



FIG. 21
RFB-1112-B-03



FIG. 22
RFB-1112-W




FIG. 23
RFB-1112-W-03



FIG. 24
RFB-1113-1B

PHOTOS FOR REFERENCE ONLY, SHOWN AT 100% ACTUAL SIZE.

PART #	FIG	DESCRIPTION	CBL GRP	NOTES	REPLACES OR EQUIVALENT TO	PLATING			RECOM- MENDED TOOL
						BDY	P/C	DIE	
RFB-1110-1	13	MALE RIGHT ANGLE	C	FOR RG-58/U		N	G	T	RFA-4009-206
RFB-1110-B	14	MALE RIGHT ANGLE	B	FOR RG-174A/U & RG-316/U		N	G	T	RFA-4009-204
RFB-1110-C-04	15	MALE RIGHT ANGLE CLAMP	C, C1	FOR RG-58/U & RG-142/U		S	G	T	
RFB-1110-C1	13	MALE RIGHT ANGLE CRIMP	C1	FOR RG-55/U & RG-142/U		N	G	T	RFA-4009-206
RFB-1110-C2	13	MALE RIGHT ANGLE CRIMP	C2	FOR TIMES LMR-200		N	G	T	RFA-4009-206
RFB-1111	16	FEMALE RIGHT ANGLE PCB MOUNT		WITH TRIPLE D-FLAT, DIECAST ZINC		N	G	PP	
RFB-1112-1B	17	FEMALE VERTICAL LO-PROFILE PCB MT		WITH D-FLAT & POST LEGS, BLACK		N/TP	G	PP	
RFB-1112-1B-03	18	FEMALE VERTICAL LO-PROFILE PCB MT		WITH D-FLAT & SNAP LEGS, BLACK		N/TP	G	PP	
RFB-1112-1W	19	FEMALE VERTICAL LO-PROFILE PCB MT		WITH D-FLAT & POST LEGS, WHITE		N/TP	G	PP	
RFB-1112-B	20	FEMALE R/A LO-PROFILE PCB MOUNT		WITH D-FLAT & POST LEGS, BLACK		N/TP	G	PP	
RFB-1112-B-03	21	FEMALE R/A LO-PROFILE PCB MOUNT		WITH D-FLAT & SNAP LEGS, BLACK		N/TP	G	PP	
RFB-1112-W	22	FEMALE R/A LO-PROFILE PCB MOUNT		WITH D-FLAT & POST LEGS, WHITE		N/TP	G	PP	
RFB-1112-W-03	23	FEMALE R/A LO-PROFILE PCB MOUNT		WITH D-FLAT & SNAP LEGS, WHITE		N/TP	G	PP	
RFB-1113-1B	24	FEMALE VERTICAL HI-PROFILE PCB MT		WITH D-FLAT & POST LEGS, BLACK		N/TP	G	PP	



PHOTOS FOR REFERENCE ONLY, SHOWN AT 100% ACTUAL SIZE.

PART #	FIG	DESCRIPTION	CBL GRP	NOTES	REPLACES OR EQUIVALENT TO	PLATING			RECOM- MENDED TOOL
						BDY	P/C	DIE	
RFB-1113-1B-03	25	FEMALE VERTICAL HI-PROFILE PCB MT		WITH D-FLAT & SNAP LEGS, BLACK		N/TP	G	PP	
RFB-1113-1W	26	FEMALE VERTICAL HI-PROFILE PCB MT		WITH D-FLAT & POST LEGS, WHITE		N/TP	G	PP	
RFB-1113-1W-03	27	FEMALE VERTICAL HI-PROFILE PCB MT		WITH D-FLAT & SNAP LEGS, WHITE		N/TP	G	PP	
RFB-1113-B	28	FEMALE R/A HI-PROFILE PCB MOUNT		WITH D-FLAT & POST LEGS, BLACK		N/TP	G	PP	
RFB-1113-B-04	29	FEMALE R/A HI-PROFILE PCB MOUNT		WITH D-FLAT & POST LEGS, BLACK, NO HARDWARE		N/TP	G	PP	
RFB-1113-W	30	FEMALE R/A HI-PROFILE PCB MOUNT		WITH D-FLAT & POST LEGS, WHITE		N/TP	G	PP	
RFB-1113-W-03	31	FEMALE R/A HI-PROFILE PCB MOUNT		WITH D-FLAT & SNAP LEGS, WHITE		N/TP	G	PP	
RFB-1115	32	FEMALE PANEL MOUNT		4 HOLE FLANGE	UG-290A/U	N	G	T	
RFB-1115-3	33	FEMALE VERTICAL PCB MOUNT		3 LEG		N	G	T	
RFB-1115-4	34	FEMALE VERTICAL PCB MOUNT		4 LEG		S	G	T	
RFB-1115-6	35	FEMALE R/A PCB MOUNT		LONG, DIECAST ZINC		N	G	T	
RFB-1115-14	36	FEMALE FLANGE		4 HOLE FLANGE WITH HOLES .720" ON CENTER		S	G	T	




FIG. 37
RFB-1115-21



FIG. 38
RFB-1116, -3



FIG. 39
RFB-1116-11, -NG, -SG



FIG. 40
RFB-1116-B-03



FIG. 41
RFB-1116-I



FIG. 42
RFB-1116-I-03



FIG. 43
RFB-1116-NG-03



FIG. 44
RFB-1117, -C1,
C1T, -C2

PHOTOS FOR REFERENCE ONLY, SHOWN AT 100% ACTUAL SIZE.

PART #	FIG	DESCRIPTION	CBL GRP	NOTES	REPLACES OR EQUIVALENT TO	PLATING			RECOM- MENDED TOOL
						BDY	P/C	DIE	
RFB-1115-21	37	FEMALE VERTICAL PCB MOUNT		.5" ON CENTER		N	S	T	
RFB-1115-S	32	FEMALE PANEL MOUNT		4 HOLE FLANGE	UG-290A/U	S	G	T	
RFB-1116	38	FEMALE BULKHEAD		FRONT MOUNT WITH D-FLAT, DIECAST ZINC	UG-1094A/U	N	G	D	
RFB-1116-3	38	FEMALE BULKHEAD		FRONT MNT W/ D-FLAT & LOCKWASHER (NO SOLDER LUG)		N	G	T	
RFB-1116-11	39	FEMALE BULKHEAD		FRONT MOUNT W/ BERYLLIUM COPPER CONTACT		N	G	T	
RFB-1116-B-03	40	FEMALE BULKHEAD CRIMP	B	FRONT MOUNT FOR RG-174/U &RG-316/U		N	G	T	RFA-4005-100 & RFA-4005-05
RFB-1116-I	41	FEMALE BULKHEAD		FRONT MOUNT WITH D-FLAT, INSULATED		N	G	TP	
RFB-1116-I-03	42	FEMALE BULKHEAD		FRONT MOUNT WITH D-FLAT, INSULATED, WITH .500 MOUNTING THREADS, NO HARDWARE		N	G	TP	
RFB-1116-NG	39	FEMALE BULKHEAD		FRONT MOUNT WITH D-FLAT & SOLDER LUG	UG-1094A/U	N	G	T	
RFB-1116-NG-03	43	FEMALE BULKHEAD		SOLDER CUP W/O HARDWARE		N	G	T	
RFB-1116-SG	39	FEMALE BULKHEAD		FRONT MOUNT WITH D-FLAT	UG-1094A/U	S	G	T	
RFB-1117	44	FEMALE CRIMP BULKHEAD	C	REAR MOUNT WITH D-FLAT & O-RING FOR RG-58/U		N	G	D	RFA-4009-206




FIG. 45
RFB-1117-B1-T, -BT, -BT-03




FIG. 46
RFB-1117-BT-04



FIG. 47
RFB-1121

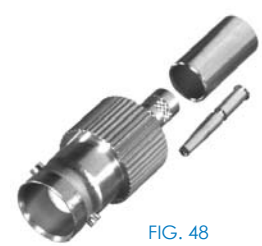


FIG. 48
RFB-1123-1, -1-SS, -C1,
-C2, RFB-1124-1P, -1X



FIG. 49
RFB-1130, -1



FIG. 50
RFB-1130-2



FIG. 51
RFB-1130-3



FIG. 52
RFB-1130-5

PHOTOS FOR REFERENCE ONLY, SHOWN AT 100% ACTUAL SIZE.

PART #	FIG	DESCRIPTION	CBL GRP	NOTES	REPLACES OR EQUIVALENT TO	PLATING			RECOM- MENDED TOOL
						BDY	P/C	DIE	
RFB-1117-B1-T	45	FEMALE CRIMP BULKHEAD	B1	REAR MOUNT WITH D-FLAT & O-RING FOR RG-316 DOUBLE SHIELD, MAX. PANEL THICKNESS .20"		N	G	T	RFA-4009-204
RFB-1117-BT	45	FEMALE CRIMP BULKHEAD	B	REAR MOUNT WITH D-FLAT & O-RING FOR RG-174/U, MAX. PANEL THICKNESS .200"		N	G	T	RFA-4009-204
RFB-1117-BT-03	45	FEMALE CRIMP BULKHEAD	B	REAR MOUNT WITH D-FLAT & O-RING FOR RG-174/U, MAX. PANEL THICKNESS .140"		N	G	T	RFA-4009-204
RFB-1117-BT-04	46	FEAMLE CRIMP BULKHEAD	B	SHORT FERRULE AND FERRULE STUD; FOR RG-174/U, RG-316/U		N	G	T	RFA-4009-204
RFB-1117-C1	44	FEMALE CRIMP BULKHEAD	C1	REAR MOUNT WITH D-FLAT & O-RING FOR RG-142/U		N	G	D	RFA-4009-206
RFB-1117-C1T	44	FEMALE CRIMP BULKHEAD	C1	REAR MOUNT WITH D-FLAT & O-RING FOR RG-142/U, MAX. PANEL THICKNESS .25"		N	G	T	RFA-4009-206
RFB-1117-C2	44	FEMALE CRIMP BULKHEAD	C2	REAR MOUNT WITH D-FLAT & O-RING FOR TIMES LMR-200		N	G	D	RFA-4009-206
RFB-1121	47	FEMALE TWIST-ON	C	FOR RG-58/U		N	S	D	
RFB-1123-1	48	FEMALE CRIMP	C	FOR RG-58/U		N	G	T	RFA-4009-206
RFB-1123-1-SS	48	FEMALE CRIMP	C	FOR RG-58/U		SS	G	T	RFA-4009-206
RFB-1123-C1	48	FEMALE CRIMP	C1	FOR RG-142/U		N	G	T	RFA-4009-206
RFB-1123-C2	48	FEMALE CRIMP	C2	FOR TIMES LMR-200		N	G	T	RFA-4009-206
RFB-1124-1P	48	FEMALE CRIMP	P	FOR PROFLEX		N	G	D	RFA-4009-203
RFB-1124-1X	48	FEMALE CRIMP	X	FOR RG-8X & TIMES LMR-240		N	G	D	RFA-4009-203
RFB-1130	49	T ADAPTER		BNC MALE TO DOUBLE BNC FEMALE	UG-274B/U, C/U	N	G	T	N/A
RFB-1130-1	49	T ADAPTER		BNC MALE TO DOUBLE BNC FEMALE, DIECAST	UG-274B/U, C/U	N	G	D	N/A
RFB-1130-2	50	T ADAPTER		BNC MALE TO DOUBLE BNC FEMALE, MOLDED PLASTIC JACKET	FOR LAN USE	N	G	D	
RFB-1130-3	51	F ADAPTER		BNC MALE TO DOUBLE BNC FEMALE	FOR LAN USE	N	G	D	
RFB-1130-5	52	GOALPOST ADAPTER		BNC MALE TO DOUBLE BNC FEMALE	FOR LAN USE	N	G	D	



FIG. 53
RFB-1131



FIG. 54
RFB-1132



FIG. 55
RFB-1133



FIG. 56
RFB-1134



FIG. 57
RFB-1135, -I, -T



FIG. 58
RFB-1138



FIG. 59
RFB-1143, -03



FIG. 60
RFB-1145



FIG. 61
RFB-1150



FIG. 62
RFB-1150-1, -2-1W



FIG. 63
RFB-1154



FIG. 64
RFB-1160

PHOTOS FOR REFERENCE ONLY, SHOWN AT 100% ACTUAL SIZE.

PART #	FIG	DESCRIPTION	CBL GRP	NOTES	REPLACES OR EQUIVALENT TO	PLATING			RECOM- MENDED TOOL
						BDY	P/C	DIE	
RFB-1131	53	T ADAPTER		TRIPLE BNC FEMALE		N	S	T	
RFB-1132	54	RIGHT ANGLE ADAPTER		BNC MALE TO BNC FEMALE	UG-306/U, A/U, B/U	N	S	T	
RFB-1133	55	BARREL ADAPTER		BNC MALE TO BNC MALE	UG-491/U, A/U, B/U	N	G	T	
RFB-1134	56	BARREL ADAPTER		BNC FEMALE TO BNC FEMALE	UG-914/U	N	G	PP	
RFB-1135	57	FEMALE BULKHEAD ADAPTER		DOUBLE BNC FEMALE WITH D-FLAT & O-RING	UG-492/U	N	G	D	
RFB-1135-I	57	FEMALE BULKHEAD ADAPTER		DOUBLE BNC FEMALE WITH D-FLAT, INSULATED		S	G	D	
RFB-1135-T	57	FEMALE BULKHEAD ADAPTER		DOUBLE BNC FEMALE WITH D-FLAT & O-RING	UG-492/U, D/U	N	G	T	
RFB-1138	58	ADAPTER		BNC FEM TO BNC MALE , CONNECTOR SAVER		N	G	D	
RFB-1143	59	MALE BULKHEAD		FRONT MOUNT, D-FLAT		N	G	T	
RFB-1143-03	59	MALE BULKHEAD		FRONT MOUNT WITHOUT SOLDER TAB, D-FLAT		N	G	T	
RFB-1145	60	BNC FEMALE TO 1/4 X 24 STUD		ADAPTER FOR KENWOOD PORTABLES TK240 & TK340		N	S	T	
RFB-1150	61	MALE TERMINATION		50 OHM, 1/2 WATT, 1.5 GHZ		N	G	D	
RFB-1150-1	62	MALE TERMINATION WITH CHAIN		50 OHM, 1/2 WATT, 1.5 GHZ		N	G	D	
RFB-1150-2-1W	62	MALE TERMINATION WITH CHAIN		50 OHM, 1 WATT, 1.5 GHZ,		S	G	T	
RFB-1154	63	FEMALE RIGHT ANGLE BULKHEAD		FRONT MOUNT W/ SOLDER CUP, O-RING & D-FLAT		N	G	T	
RFB-1160	64	FEMALE CRIMP	C	WALL PLATE FLUSH REAR MOUNT W/ D-FLAT FOR RG-58/U (LAN)		N	G	D	RFA-4009-206