

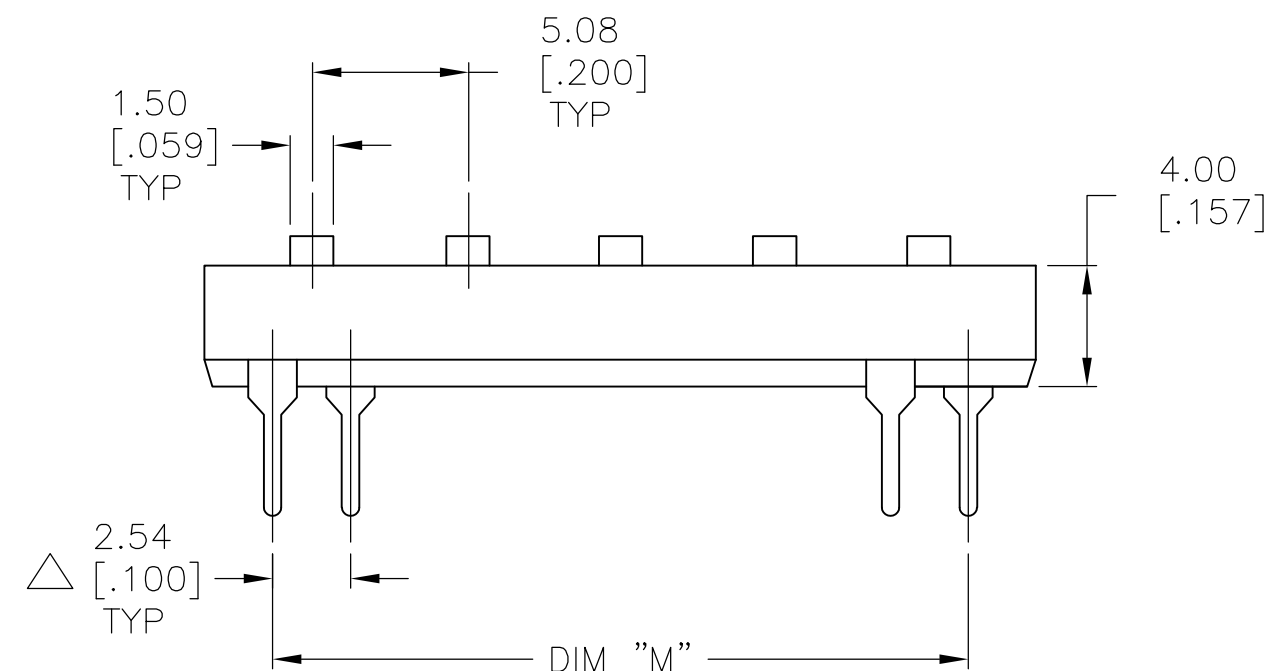
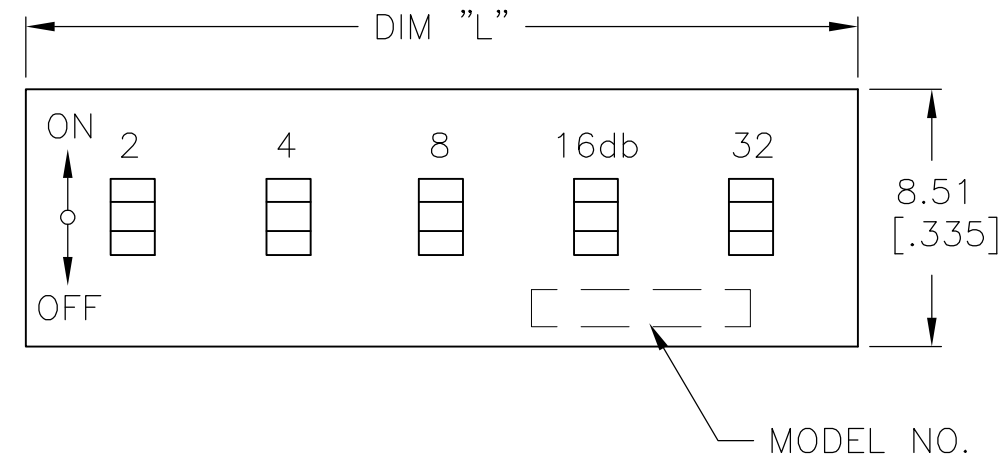


LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	ECO 07-020114	28AUG07	MB	MS
			B1	REVISED PER ECO-09-024927	07NOV09	KK	AEQ

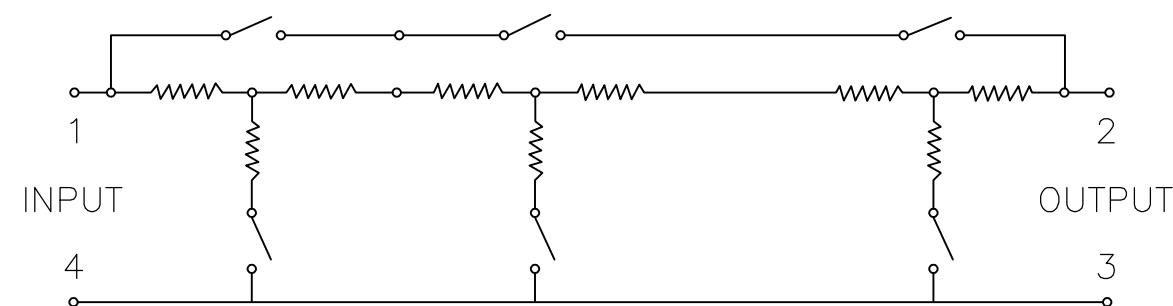

SEE SHEET 2 FOR TERMINAL
TYPES AND DIMENSIONS

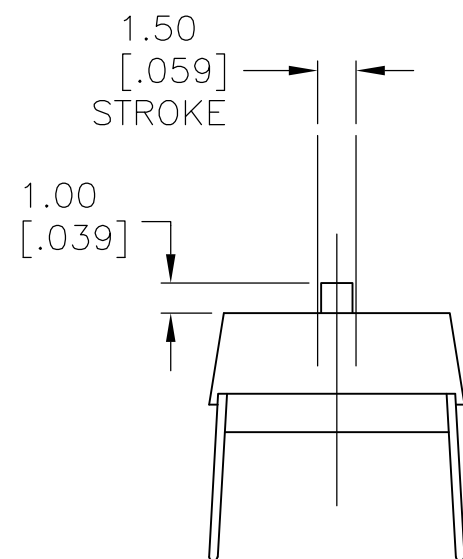

CIRCUIT: T TYPE UNBALANCED (SWITCH IN CENTER NEUTRAL POSITION)

	ORANGE	3-9db $\pm .10$ db	5MHz	75 Ohm	50mW	0.700	0.876	4	ATT475C04	1825284-3
	ORANGE	3-9db $\pm .10$ db	5MHz	75 Ohm	50mW	0.900	1.076	5	ATT575C04	1825284-2
OBSOLETE 	BLACK	25-30db $\pm .35$ db	200kHz	600 Ohm	50mW	0.900	1.076	5	ATT5600C04	1825284-1
	CASE/COVER COLOR	db RANGE TOLERANCE	FREQUENCY	IMPEDANCE	RATED POWER	DIM "M"	DIM "L"	NUMBER OF POSN.	T&B P/N	TE P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN CMM	07AUG86	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm [INCHES]		CHK PS	07JUL88	ATT SERIES DIP SWITCH	
TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD	NAME	RESTRICTED TO	
		PRODUCT SPEC	—	—	
0 PLC ± — 1 PLC ± — 2 PLC ± .01 3 PLC ± — 4 PLC ± — ANGLES ± 1°		APPLICATION SPEC	—	—	
MATERIAL		WEIGHT	—	—	
SEE SPECIFICATION		CUSTOMER DRAWING		—	
		SCALE		SHEET 1 OF 2 REV B1	

SPECIFICATIONS:

MATERIAL:

BASE, PBT UL94V-0, SEE P/N TABLE

COVER, PBT UL94V-0, SEE P/N TABLE

ACTUATOR, PBT UL94V-0, WHITE

FIXED CONTACT/TERMINAL, COPPER ALLOY, PLATE-GOLD/NICKEL

MOVING CONTACT, COPPER ALLOY, PLATE-GOLD/NICKEL

ELECTRICAL:

CONTACT RATING SWITCHING, 0.4 VA @ 20V DC

INITIAL CONTACT RESISTANCE, 50 MILLIOHMS MAX.

INSULATION RESISTANCE, 100 MEGOHMS MIN. @ 100V DC.

DIELECTRIC STRENGTH, 500V AC RMS @ SEA LEVEL

LIFE, 5,000 CYCLES

MECHANICAL:

OPERATING FORCE, LESS THAN 800 GRAMS

TRAVEL, .059

ENVIRONMENTAL:

OPERATING TEMPERATURE: -30 TO +85 DEGREES C

STORAGE TEMPERATURE: -45 TO +100 DEGREES C

CLEANING, AQUEOUS OR SOLVENT

SOLDER HEAT RESISTANCE, PER 109-202, CONDITION B

SOLDERABILITY- PER JIS-C-0050 & JIS-C-00053

NOTES:

1. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

1825284

B

A

 Tyco Electronics		Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
NAME		ATT SERIES	
		DIP SWITCH	
		-	
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1825284	-
SCALE		SHEET	REV
1:1		1 OF	D1



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
AD	OO		—	SEE SHEET 1	—	—

D

C

B

A

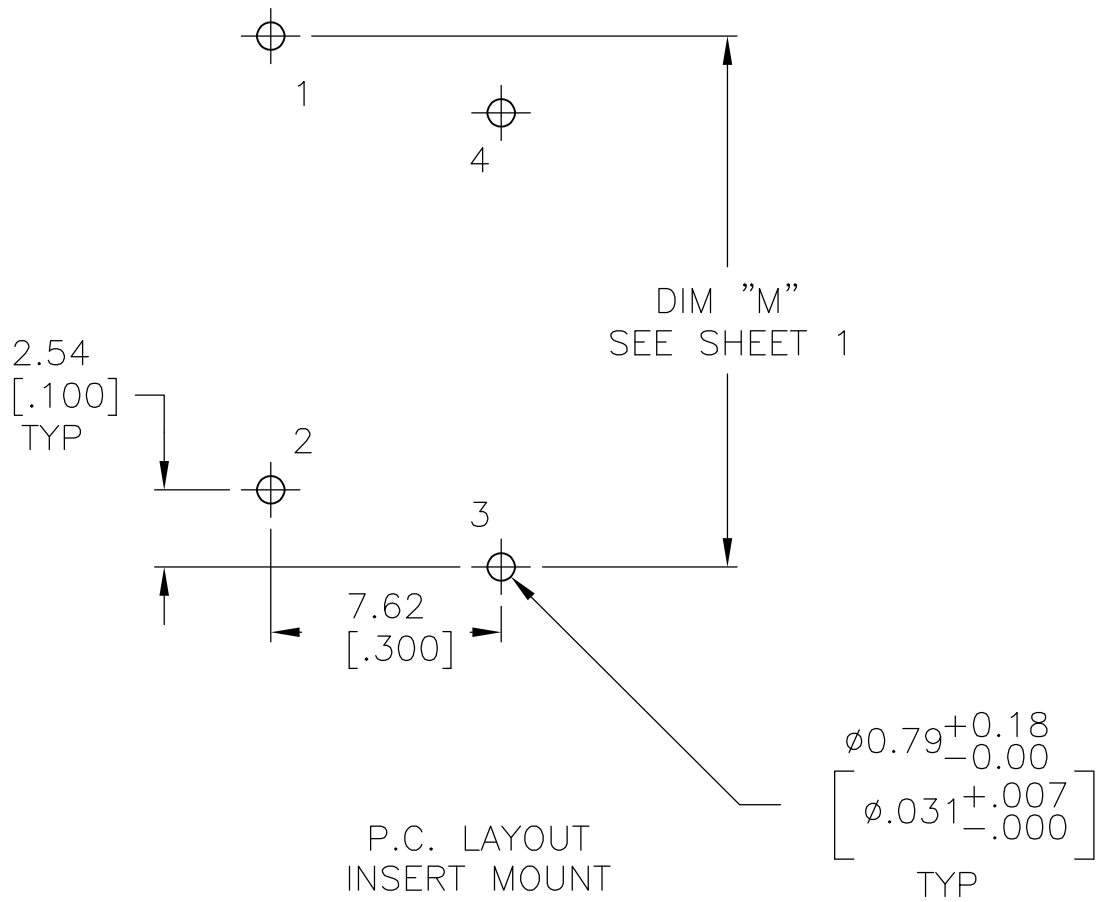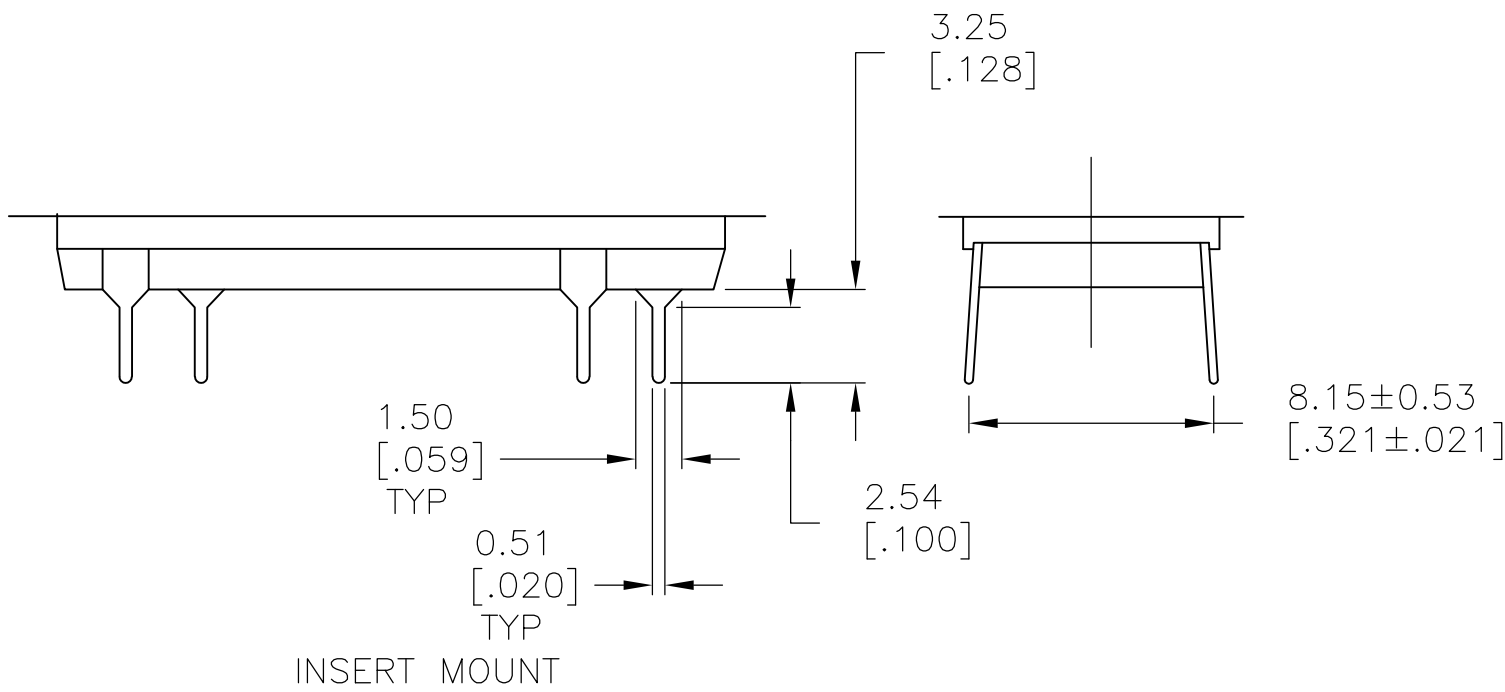


D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN CMM07AUG86		 Tyco Electronics Corporation Harrisburg, Pa 17105-3608			
		CHK PS07JUL88					
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD —		NAME	
		0 PLC ± —		PRODUCT SPEC —		ATT SERIES DIP SWITCH	
		1 PLC ± —					
		2 PLC ± —					
		3 PLC ± .010					
		4 PLC ± —		APPLICATION SPEC —			
		ANGLES ± 1°		—		SIZE	
MATERIAL		FINISH		WEIGHT —		CAGE CODE	
SEE SPECIFICATION		—		A2		DRAWING NO	
				00779		RESTRICTED TO	
				C=1825284		—	
				CUSTOMER DRAWING		SCALE 4:1	
						SHEET 2 OF 2	
						REV B1	

1825284