

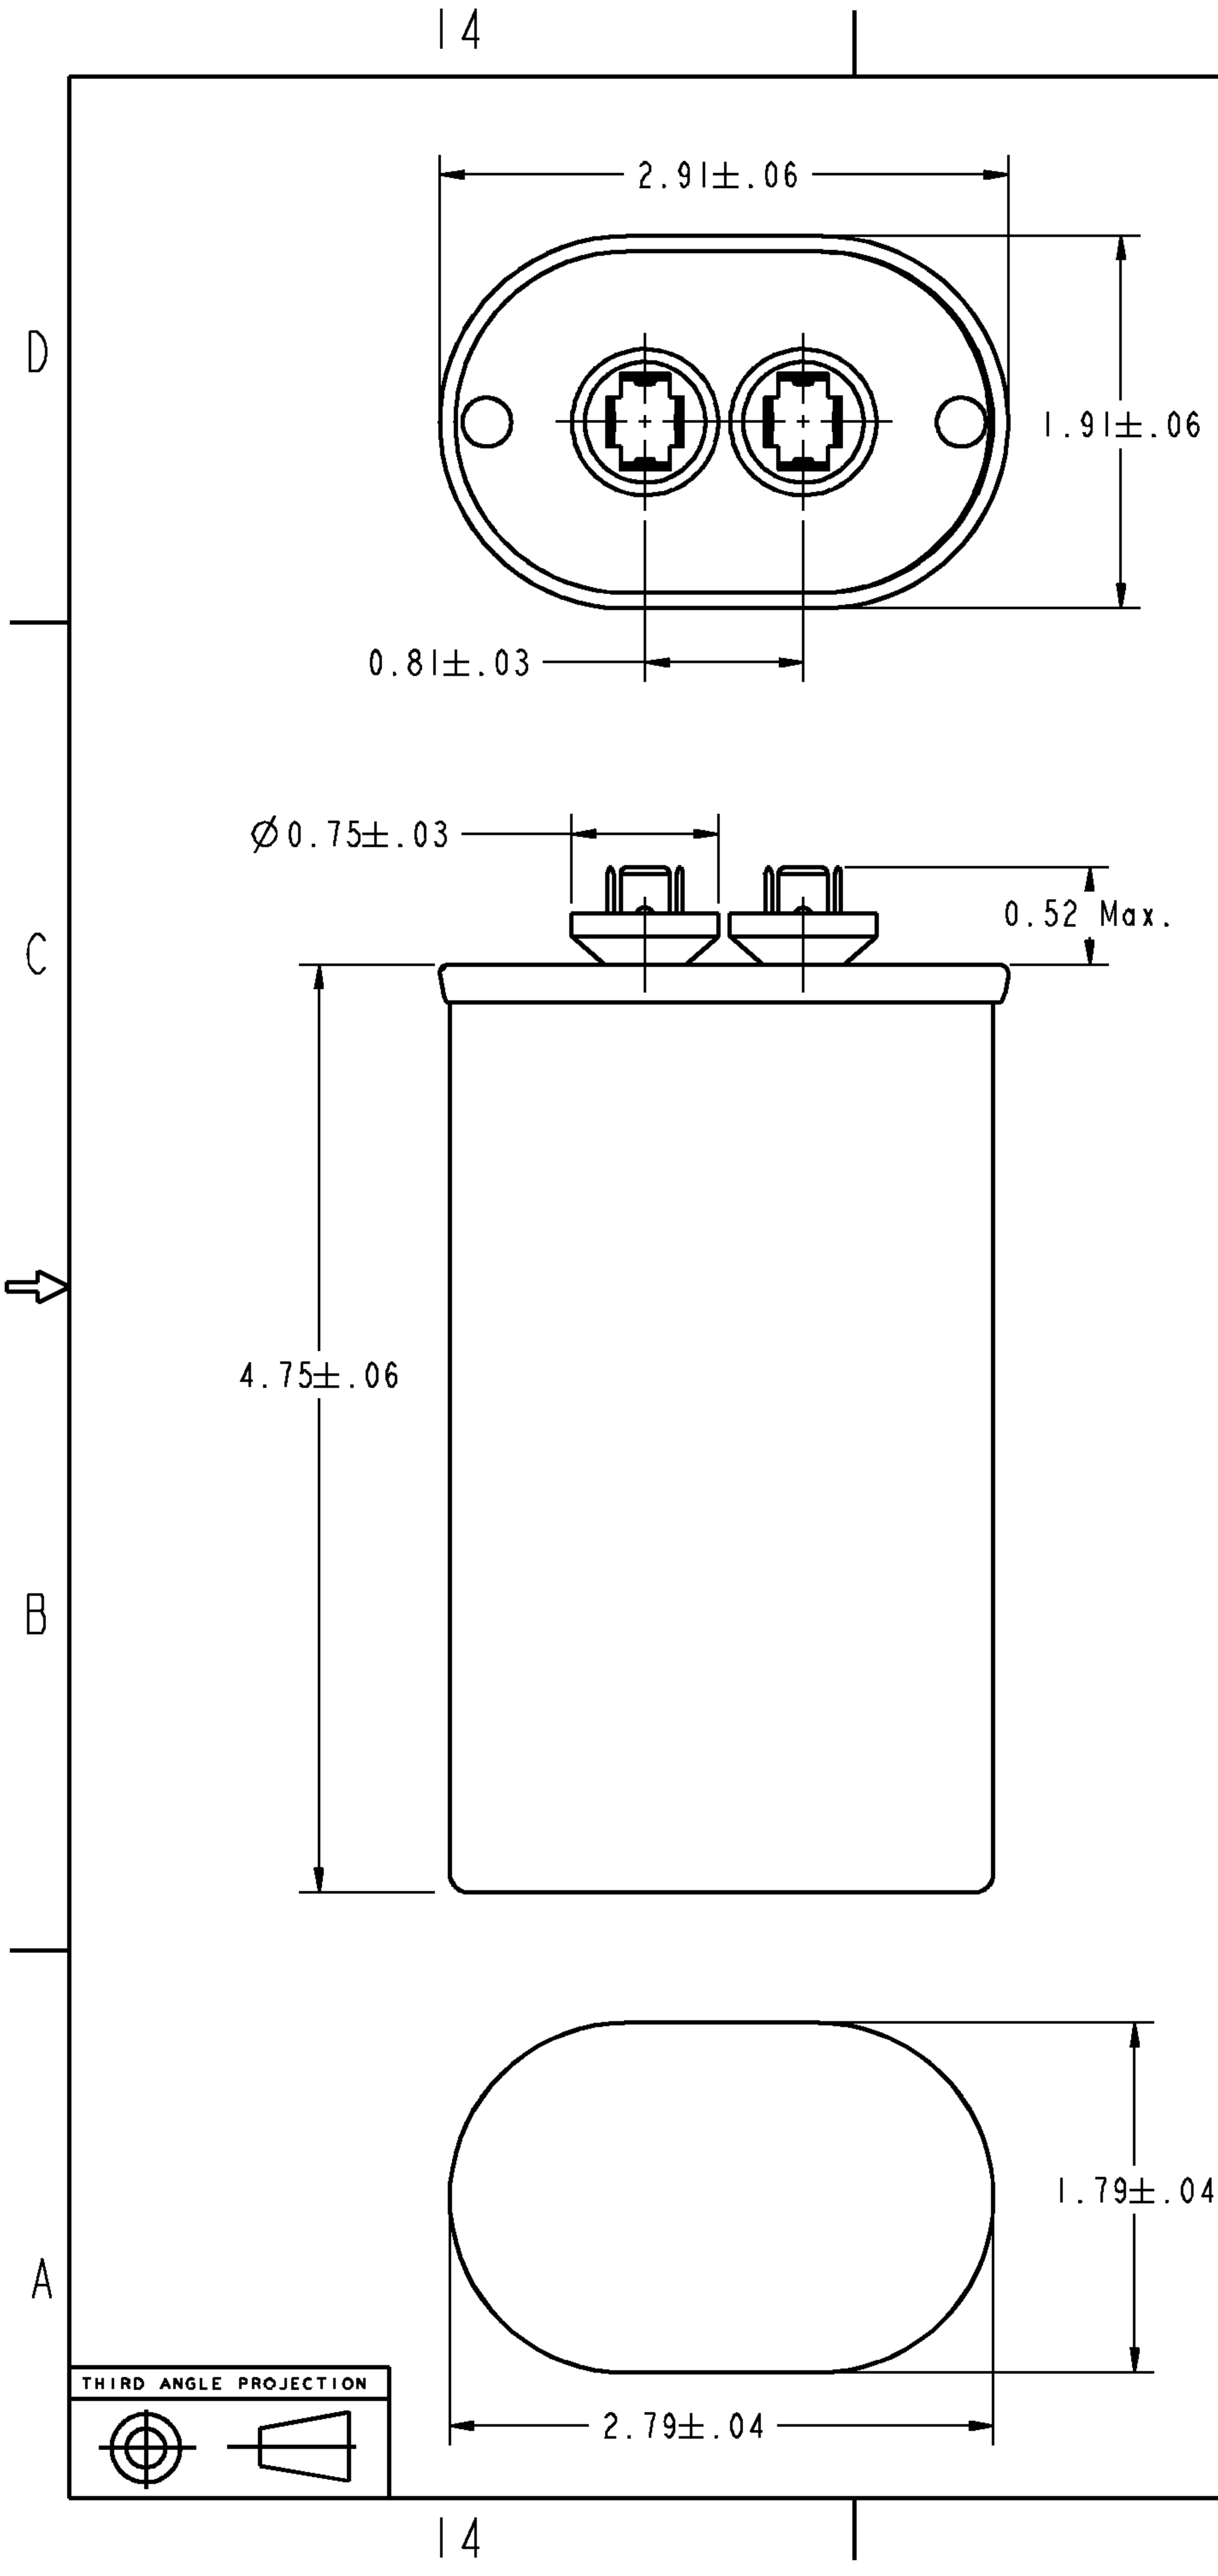


NAME: 501221413 OBJECT: 2T_CAPACITOR_ASM DATE: 30-Jul-07 18:42:34

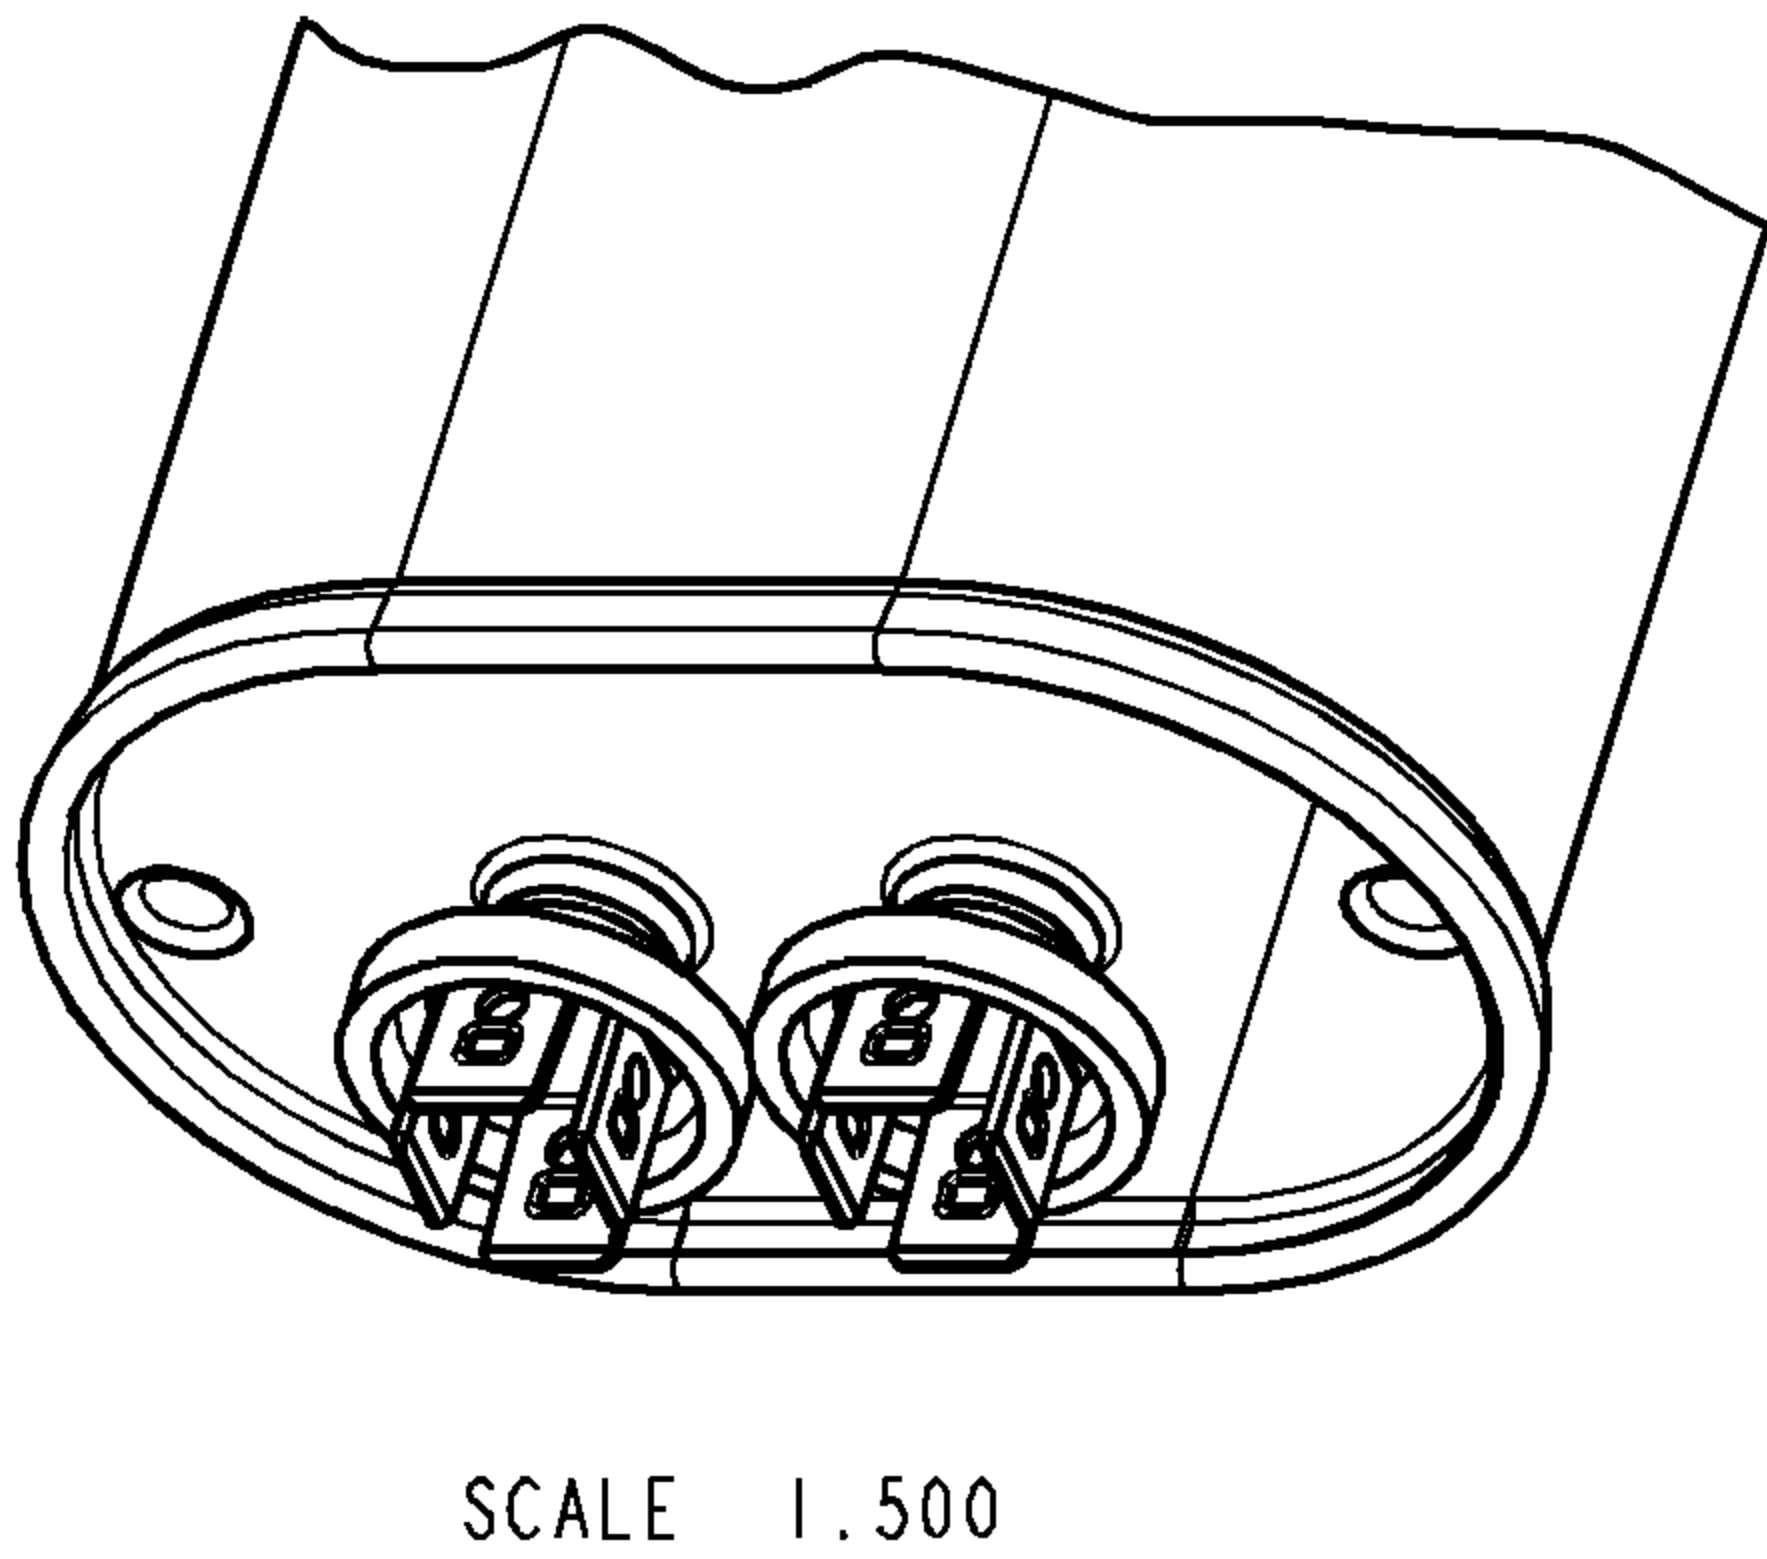

RBC PROPRIETARY AND CONFIDENTIAL INFORMATION
This document is the property of REGAL BELOIT CORPORATION ("RBC") including its subsidiaries and divisions and contains proprietary information of RBC. This document is loaned on the express condition that neither it nor the information contained therein shall be disclosed to others without the express written consent of RBC, and that the information shall be used by the recipient only as approved expressly by RBC. This document shall be returned to RBC upon its request. This document may be subject to certain restrictions under U.S. export control laws and regulations.

SIZE		DRAWING NO.		REV	SHEET
C		27L6073		0	1
REVISIONS					
REV.	DESCRIPTION			DATE	APPROVED
.	.			.	.

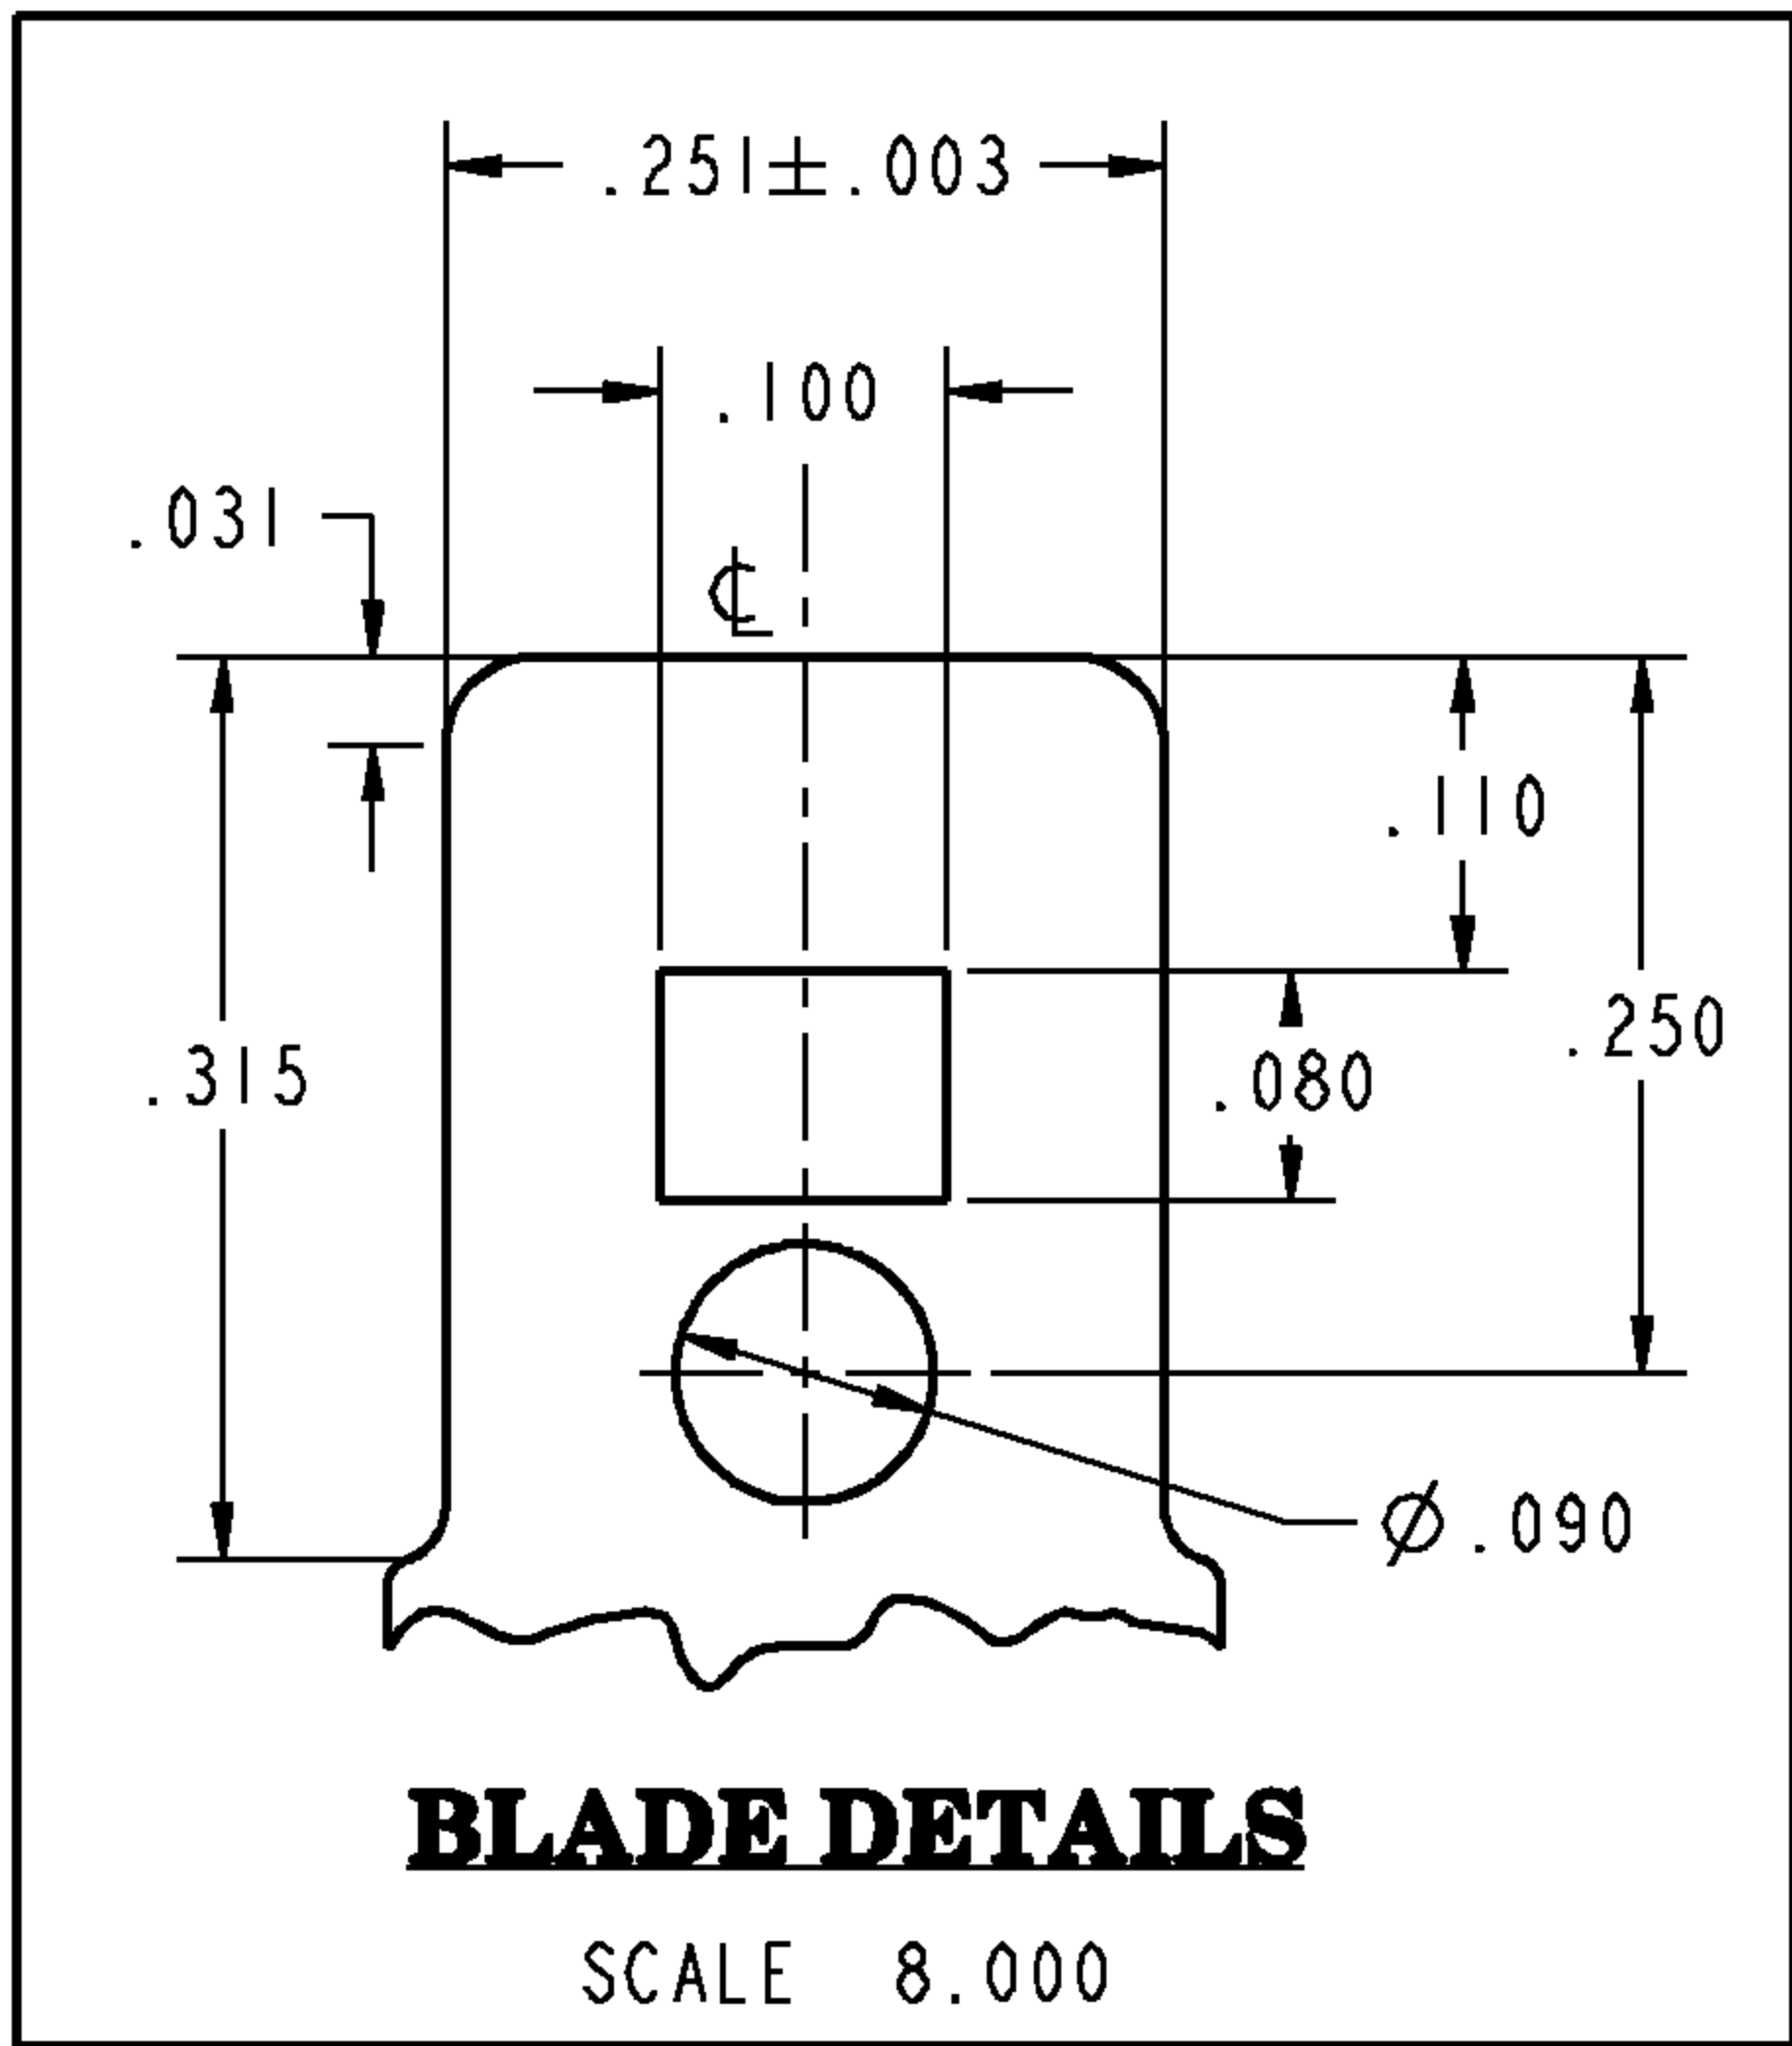

SPECIFICATIONS :

"GEM-III Capacitors are manufactured with High Grade Metallized Polypropylene Film"

Main Capacitance	: 15.00 μ F $\pm$ 3%
Secondary Capacitance	: NIL
Volts	: 660AC
Leakage Current	: 30 μ A Max.
Frequency	: 50/60 HZ
Operating Temperature	: -40 DEG C TO 70 DEG C
Storage Temperature	: -40 DEG C TO 90 DEG C
Operative Life	: 60,000 HRS WITH 94% SURVIVAL
Dissipation Factor	: 0.1% MAX.
Case Material	: ALUMINIUM
Cover Material	: STEEL TIN PLATED
Terminals	: 0.250"x0.031" Quick Connect Blades
Dielectric Fluid	: DIELEKTROL VI
Internal Protection	: UL RECOGNIZED PRESSURE SENSITIVE INTERRUPTER

FOR ADDITIONAL INFO REFER TO:		SIGNATURES	DATE
APPLIED PRACTICES	MODEL	AVL	07/30/07
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DETAIL	AVL 07/30/07
TOLERANCE ON: 1 PL DECIMALS $\pm$ 0.1 2 PL DECIMALS $\pm$ 0.01 3 PL DECIMALS $\pm$ 0.001 ANGLES $\pm$ 0.5 FRACTIONS $\pm$ FINISH ☒		CHECKED	HV 07/30/07
		ENGRG	.
		MFG	.
		QUALITY	.
		ISSUED	.
MATERIAL		SOLID MODEL: 2TCAPACITOR_ASM	

		REGAL-BELOIT CORPORATION	
TITLE			
GEM III CAPACITOR OUTLINE DRAWING			
SIZE	DRAWING	REV	
C	27L6073	0	
SCALE: 1.250		REF. No:	SHEET 1 OF 1