

PRODUCT DATA DRAWING

CAD
GENERATED
DRAWING

DCN
CONTROLLED
DOCUMENT

DWG. NO.

2980-6001

ENG. FILE COPY

MATERIAL:

BODY: STAINLESS STEEL PER AMS-5640,
UNS S30300, TYPE I.

CONTACT: BERYLLIUM COPPER PER ASTM-B-196,
ALLOY C17300, COND. TD04.


INSULATOR: TEFLON PER ASTM-D-1457.

FINISH:

BODY: GOLD PER MIL-G-45204, TYPE I,
GRADE C, CLASS 00; OVER NICKEL
PER QQ-N-290, CLASS 1.

CONTACT: GOLD PER MIL-G-45204, TYPE I,
GRADE C, CLASS 1; OVER NICKEL
PER QQ-N-290, CLASS 1.

IMPEDANCE: 50 OHMS
FREQ. RANGE: DC-18.0 GHz
D.W.V.: 1000 VRMS
INSUL. RES.: 5000 MEGOHMS MIN.

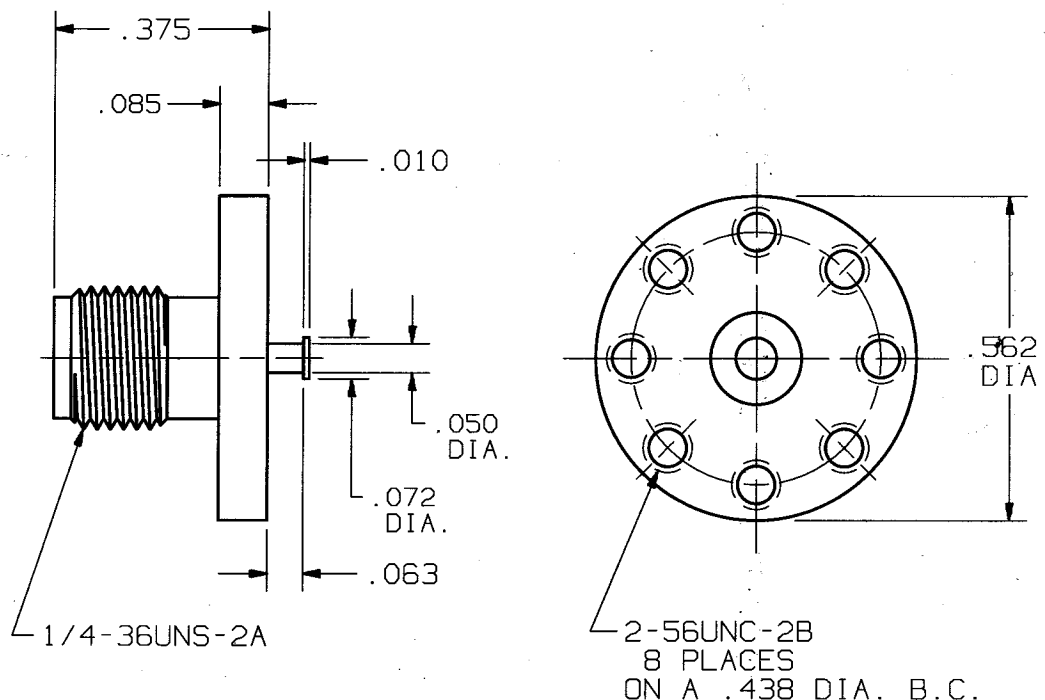

SYM.	DESCRIPTION	DATE	APPR.	UNLESS OTHERWISE SPECIFIED:		DIMENSIONS ARE IN INCHES			Solitron Vector Microwave 3301 ELECTRONICS WAY WEST PALM BEACH, FL. 33407	
A	REV.DCN F8610	10/81	RG	1)ALL DIMENSIONS ARE AFTER PLATING. 2)BREAK CORNERS & EDGES .005 R.MAX. 3)CHAM. 1st & LAST THDS. 4)SURFACE ROUGHNESS 63 / MIL-STD-10. 5)DIAS. ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 6)REMOVE ALL BURRS.	TOLERANCES:					
B	REV.DCN 23354				DECIMALS	FRACTIONAL	ANGULAR			
					.X ±.030		X° ±1°0'			
					.XX ±.015	±1/64	X°X' ±15'			
					.XXX ±.005					
					MATERIAL:		SEE ABOVE		TITLE: SMA JACK STRIPLINE LAUNCHER PANEL MOUNT	
				REDRAWN:	BRT	3/19/97	FINISH:	SEE ABOVE		AREA:
				CHECKED:	WJT	10/22/81	SIZE	CAGE NO.	SCALE	DWG. NO.
				APPROVED:	DGG	10/23/81	A	95077	3X	2980-6001