
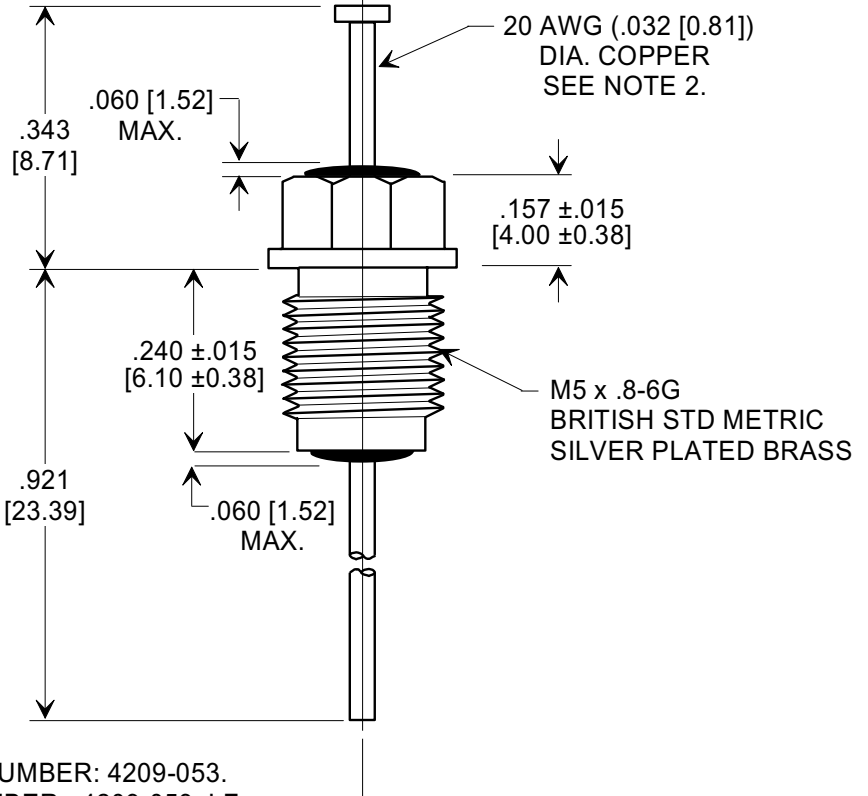
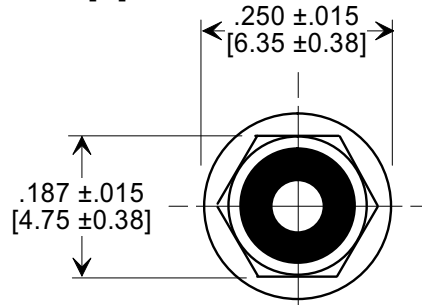



MARKETING SALES DRAWING


This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.


DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



SILVER PLATED MOUNTING HARDWARE

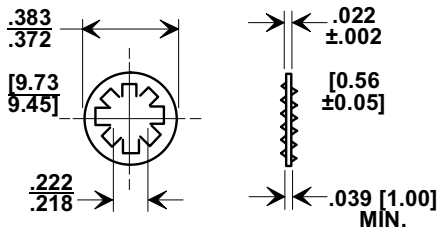

LOCK WASHER

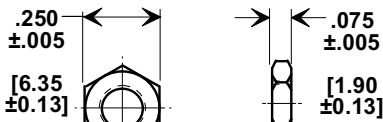

M5X .8 - 6H
AFTER
PLATING

HEX NUT

NOTES:

1. TUSONIX NON-RoHS COMPLIANT PART NUMBER: 4209-053.
TUSONIX RoHS COMPLIANT PART NUMBER: 4209-053 LF.
CUSTOMER MUST SPECIFY NON-RoHS OR RoHS PART NUMBER WHEN ORDERING.
2. LEAD FINISH: NON-RoHS PART #: 60/40 SOLDER PLATED. RoHS PART #: SILVER PLATED.
3. PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS.
NON-RoHS PART: BLACK INK. RoHS PART: GREEN INK.
4. FLAMMABILITY RATING OF EPOXY IS UL94-V0

5500	350	100	10 A	I.R. MIN. @ 100 (VDC.)	DWV	20	65	70	70
	85°C	125 °C				10 MHz	100 MHz	1 GHz	10 GHz
MIN. CAP. (pF)	WORKING VOLTAGE (WVdc)		CURRENT IDC	10 G Ω	700 vdc	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD -220			

REVISION RECORD	Original Release	ECO-4380	A	B	ECO-7200056	TUSONIX TUCSON, ARIZONA	Title BUSHING STYLE EMI FILTER	
	REVISED NOTES R.J 02-24-15						Drawn S.M. 10-20-98	
	ADDED NOTE 4 R.J 05-06-16						Approved S.C. 10-20-98	
							A	4209-053

X-2015 Rev-0

Original Release C.O. 4668	0
WVDC 85° C WAS 200. E.C. 03-18-97	
970318-2	1
RDN TO COMP FMT & ADDED L WASHER, HET NUT & NOTE 1. S.M. 10-20-98	
19981019-5-01	2
ADDED METRIC, CIRCUIT & ORIENTATION. S.M. 12-18-01	
20011210-2-04	3
CAP WAS 5000. FIXED METRIC 2 PLCS. S.M. 07-14-03	
20030711-1-01	4
SOLDER PLATED,SOLDER PLATED COPPER,SILVER PLATED BRASS & IR MIN. @ 100 VDC &DWV COLUMNS ADDED & NOTE DELETED L.E. 01-30-04	
20040130-1-01	5
ADDED NOTES. S.M. 04-22-05	
20050418-1-02	6