


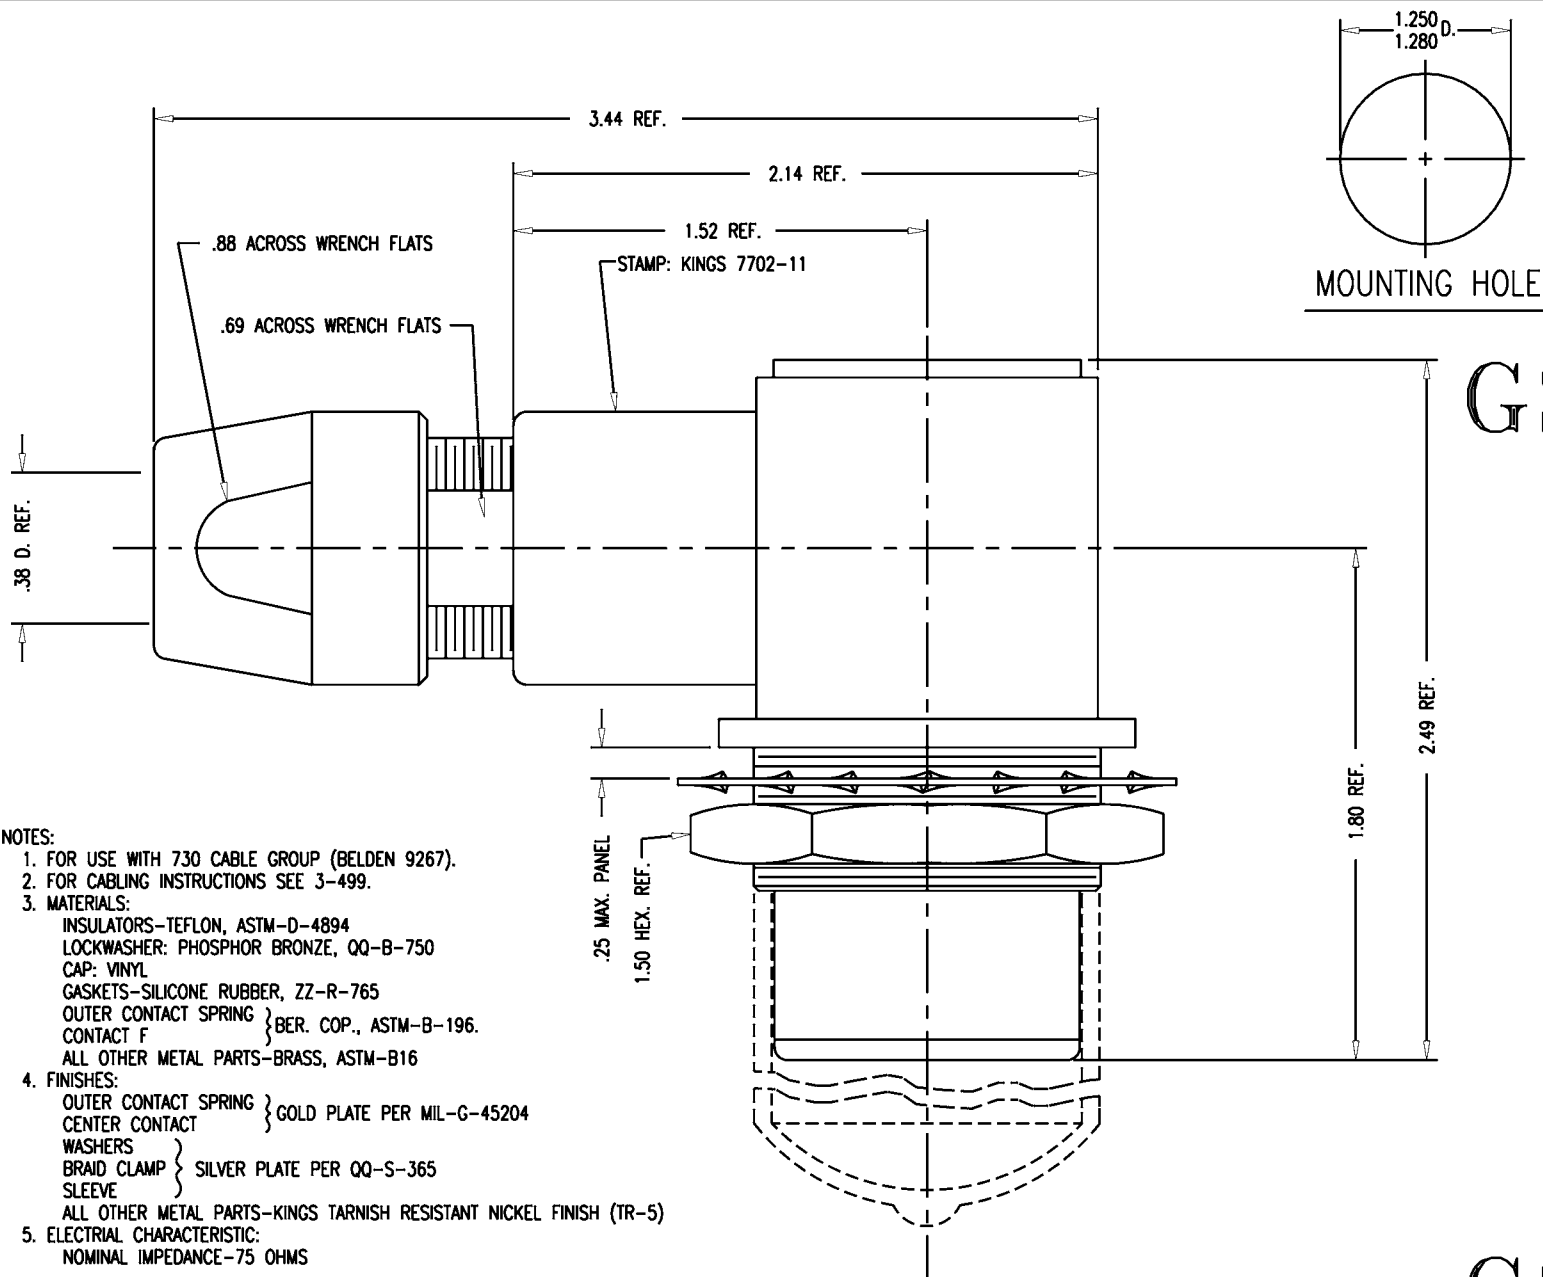

# NOTES:

- FOR USE WITH 730 CABLE GROUP (BELDEN 9267).
- FOR CABLING INSTRUCTIONS SEE 3-499.
- MATERIALS:
  - INSULATORS-TEFLON, ASTM-D-4894
  - LOCKWASHER: PHOSPHOR BRONZE, QQ-B-750
  - CAP: VINYL
  - GASKETS-SILICONE RUBBER, ZZ-R-765
  - OUTER CONTACT SPRING } BER. COP., ASTM-B-196.
  - CONTACT F }
  - ALL OTHER METAL PARTS-BRASS, ASTM-B16
- FINISHES:
  - OUTER CONTACT SPRING } GOLD PLATE PER MIL-G-45204
  - CENTER CONTACT }
  - WASHERS }
  - BRAID CLAMP } SILVER PLATE PER QQ-S-365
  - SLEEVE }
  - ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
- ELECTRIAL CHARACTERISTIC:
  - NOMINAL IMPEDANCE-75 OHMS

## REVISIONS

| ISSUE | CHANGES                    |
|-------|----------------------------|
| 0     | ER 36033<br>KH 01/25/95    |
| 1     | CN 38864 E<br>JPK 06/03/03 |

7702-11

MOUNTING HOLE

GSD

7702-11SD

SCALE 2:1

APPROX SURFACE AREA

WAS: E-18682

USED ON

REF:

JACK, ANGLE, BULKHEAT,  
TRI-LOC

DRAWN KH DATE 01/25/95

DESIGN GA DATE 01/26/95

APPR. DW DATE 09/11/95

**KINGS**

ELECTRONICS CO., INC.  
ROCK HILL, SOUTH CAROLINA 29730

7702-11

GSD