

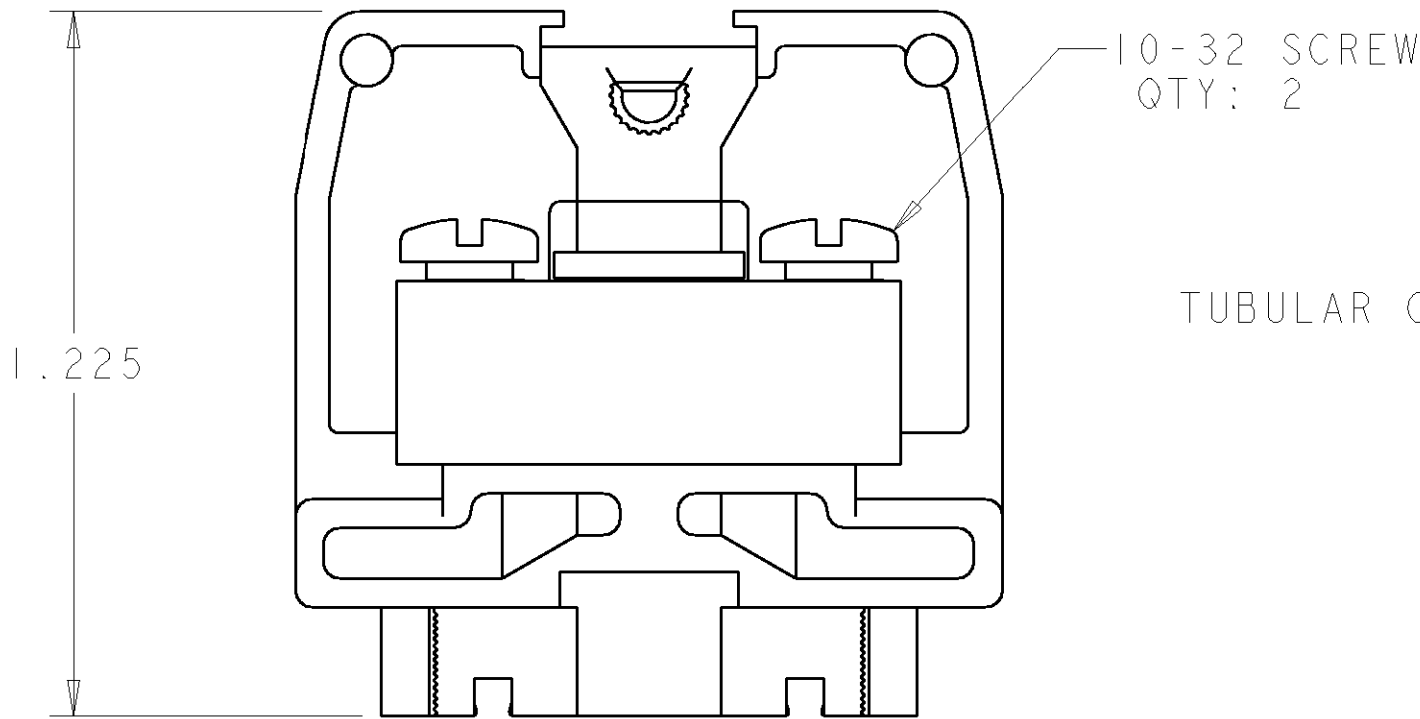
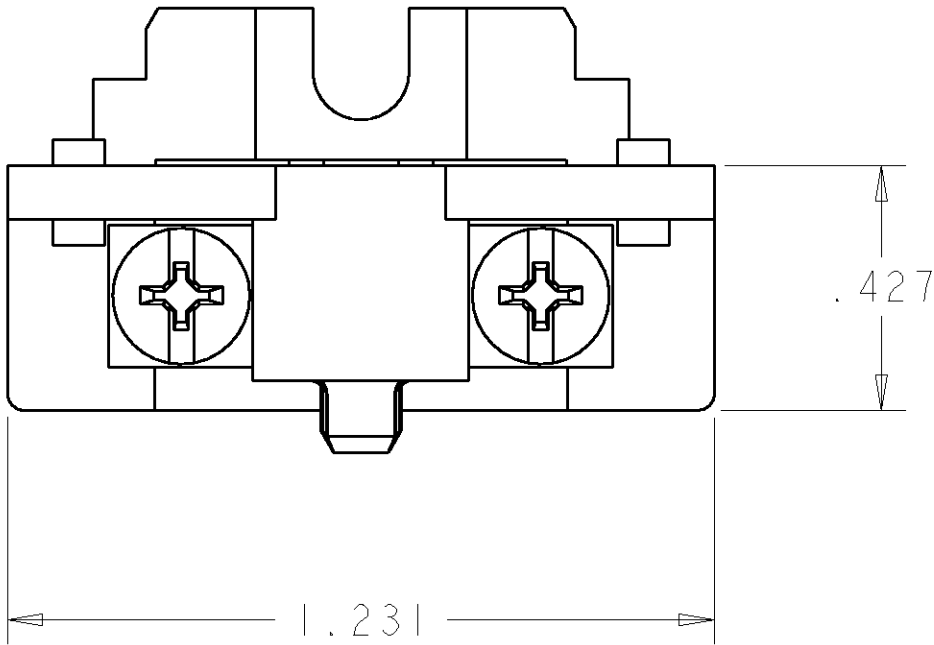


LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	PRELIMINARY	-	-	-
			B	REVISED EC 0G3B-0237-02	23APR2002	SW	SY
			C	REVISED EC 0G3B-0298-02	11JUN2002	SW	SY
			D	REVISED EC 0G3B-0440-02	08AUG2002	SW	SY

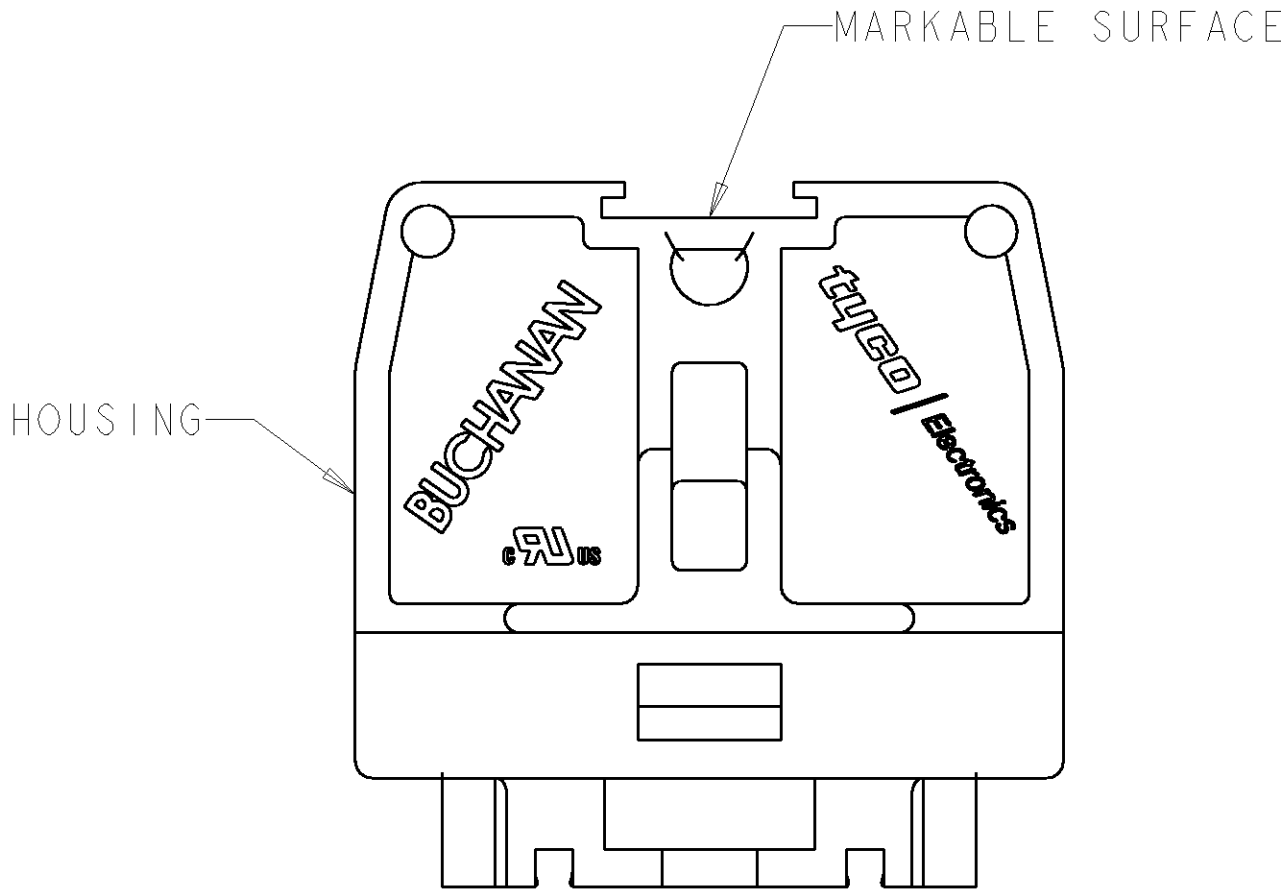

TUBULAR CONTACT

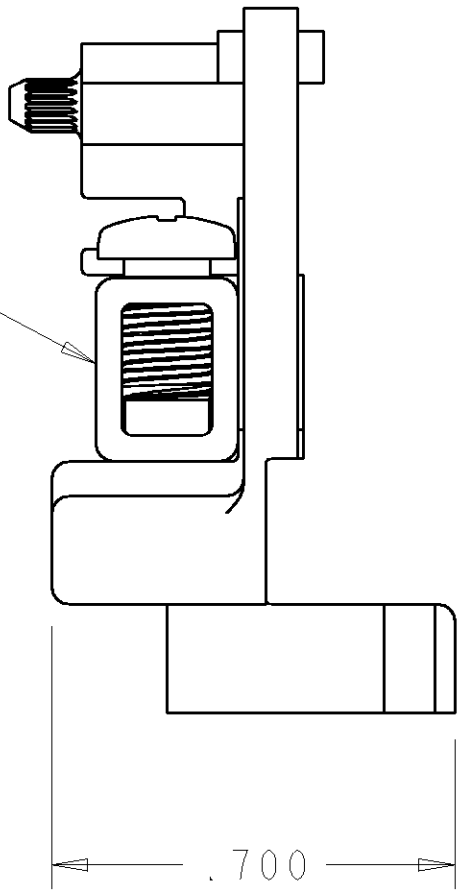

- 1 PHYSICAL PROPERTIES (STANDARD)
HOUSING: POLYESTER, UL 94V-0 RATED, COLOR: GRAY.
TUBULAR CONTACT: COPPER ALLOY, ZINC PLATED.
SCREW: STEEL, ZINC PLATED CLEAR CHROMATE.
- 2 PHYSICAL PROPERTIES (DURAMAX)
HOUSING: POLYESTER, UL 94V-0 RATED, COLOR: GRAY.
TUBULAR CONTACT: COPPER ALLOY, NICKEL PLATED.
SCREW: COPPER ALLOY, NICKEL PLATED.
3. MECHANICAL
PITCH: .375
MOUNTING: DIRECT MOUNT OR MINIATURE CHANNEL AND CLAMP.
OPERATING TEMPERATURE: 150°C MAX.
TORQUE: RECOMMENDED TIGHTENING TORQUE IS 8 IN-LBS.
4. ELECTRICAL
MAXIMUM CURRENT: 50A
OPERATING VOLTAGE: 600 V
WIRE RANGE: 8-22 AWG.
- 5 SEE RESTRICTED CUSTOMER DRAWING 4-1437394-3.

-	4-1437394-3	5
2	1546147-2	
1	1546147-1	
MATERIAL / FINISH		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN S. WELDON 15JAN2002	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK S. YODER 15JAN2002	NAME ASSEMBLY, TERMINAL BLOCK, NEMA, FLAT BASE, MEDIUM DUTY, TUBULAR SCREW	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. YODER 15JAN2002		
0 PLC ± 1 PLC ±0.0 2 PLC ±0.00 3 PLC ±0.010 4 PLC ±0.0000 ANGLES ±		PRODUCT SPEC -	SIZE A2	
MATERIAL SEE TABLE		APPLICATION SPEC -	CAGE CODE 00779	
FINISH SEE TABLE		WEIGHT -	DRAWING NO 1546147	
		CUSTOMER DRAWING	RESTRICTED TO -	
		SCALE 3:1	SHEET 1 OF 1	
			REV D	