


ZONE	REV	DESCRIPTION	DATE	BY
-	A	ECO 11663	05/22/00	IMG
-	B	ECO 12057	08/02/00	DKN
-	C	ECO 13586	08/15/01	P.MAG

CDI P/N	APPLICABLE NOTE(S)	(Ø A)	INTERFACE(S)
-1CCSF	1,2,3,4	(.116)	FULL DETENT
-1CC	1,2,3,4	(.120)	LIMITED DETENT
-2CCSF	1,2,3,4	(.125)	SMOOTH BORE
-2CC	1,2,3,4		
-3CCSF	1,2,3,4		
-3CC	1,2,3,4		

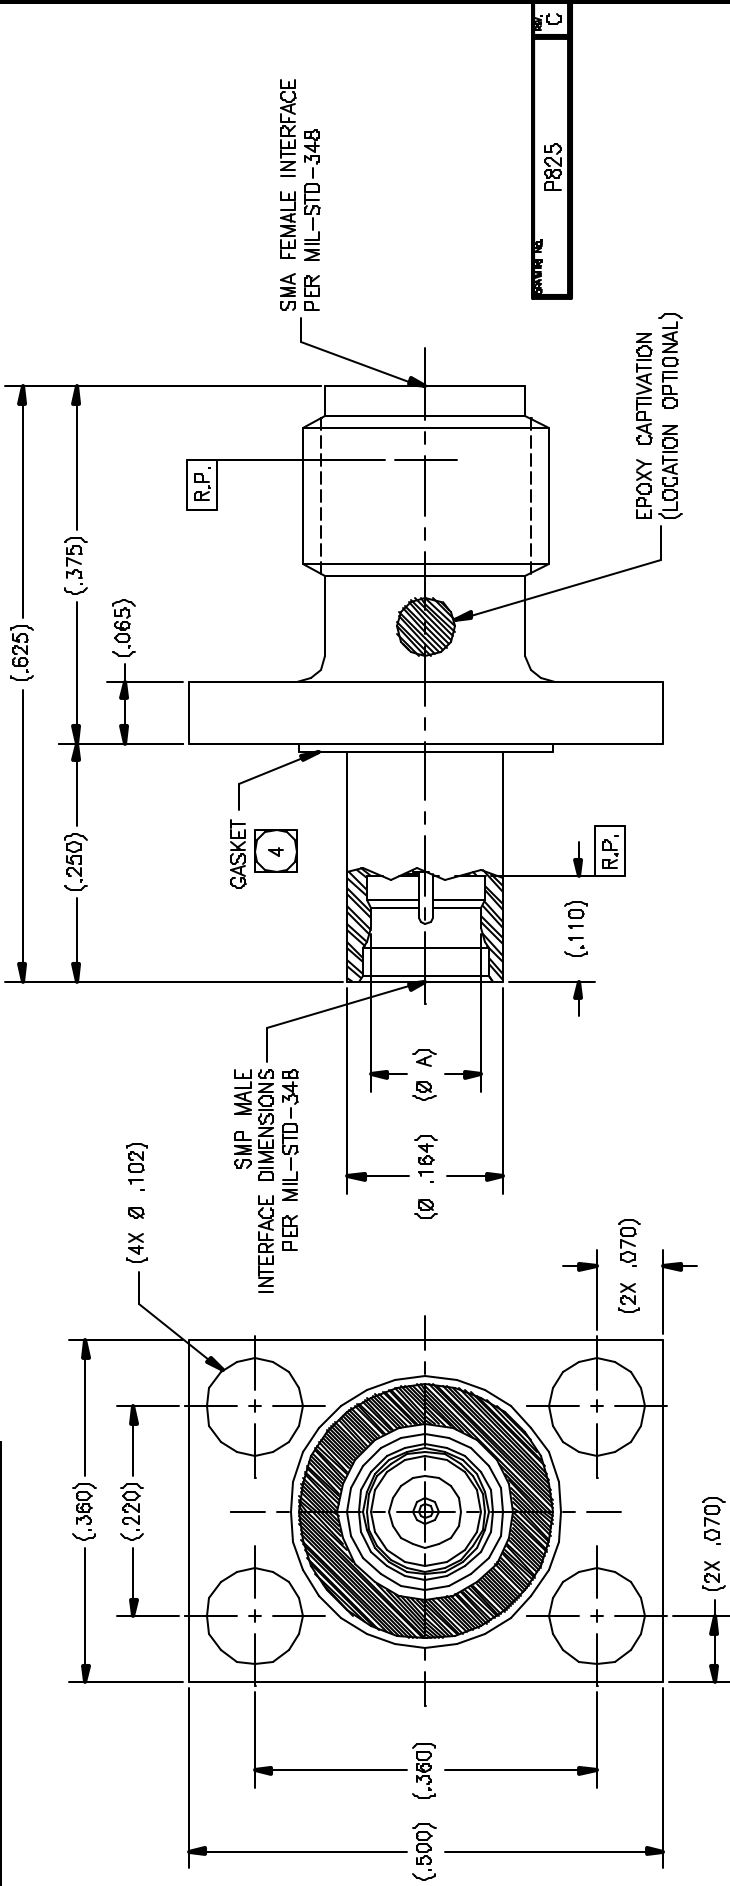

NOTE(S):

- MATERIAL(S):
 - BODY: 303 SST PER ASTM A-582.
 - CONTACT: BeCu ALLOY PER ASTM B-196.
 - INSULATOR: PIPE PER ASTM S-1710.
 - GASKET: SILICONE RUBBER PER ZZ-R-765.
 - EPOXY: SIGMA VF TYPE HF.
- FINISH(ES):
 - BODY: PASSIVATE PER ASTM A-967 (FOR -CCSF).
 - BODY: GOLD PLATE PER ASTM B-488 OVER NICKEL UNDERPLATED PER AMS-QQ-N-290 (FOR -CC).
 - CONTACT: GOLD PLATE PER ASTM B-488 OVER NICKEL UNDERPLATED PER AMS-QQ-N-290.
 - INSULATOR EPOXY & GASKET: NONE.
- ELECTRICAL PERFORMANCE(S):
 - FREQUENCY RANGE: DC-18.0 GHz.
 - R.F. INSERTION LOSS: 0.25dB Max to 18.0 GHz.
 - VSWR: 1.15:1 Max to 18.0 GHz.

4.

GASKET TO BE PACKAGED AND SHIPPED UNASSEMBLED.

SEE NOTE(S)	SIZE	SEE NOTE(S)	REVISION
-	-	-	-
Tensolite RF/Microwave Connectors			
Lang Beach, California 90815			
TITLE SMP MALE STRAIGHT TO SMA FEMALE			
4 HOLE FLANGE MOUNT ADAPTER			
SCALE 10:1			
SHEET 1 OF 1			
C 50990			
P825			

NOTICE

THE DRAWING, SPECIFICATION, AND/OR INSTRUCTIONS ARE THE PROPERTY OF TENSOLITE, INC. AND ARE NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF TENSOLITE, INC. TENSOLITE, INC. MAKES NO WARRANTY, REPRESENTATION, OR GUARANTEE, EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, OR FITNESS FOR ANY PARTICULAR PURPOSE OF THE INFORMATION CONTAINED HEREIN. TENSOLITE, INC. SHALL BE RESPONSIBLE FOR ANY ERRORS OR OMISSIONS. TENSOLITE, INC. SHALL BE RESPONSIBLE FOR ANY ERRORS OR OMISSIONS. TENSOLITE, INC. SHALL BE RESPONSIBLE FOR ANY ERRORS OR OMISSIONS.