


P/N	APPLICABLE NOTE(S)
BASIC	1,2
SF	1,2
CC	1,2
CCSF	1,2

REVISIONS			
ZONE	REV	DESCRIPTION	DATE
—	—	—	—

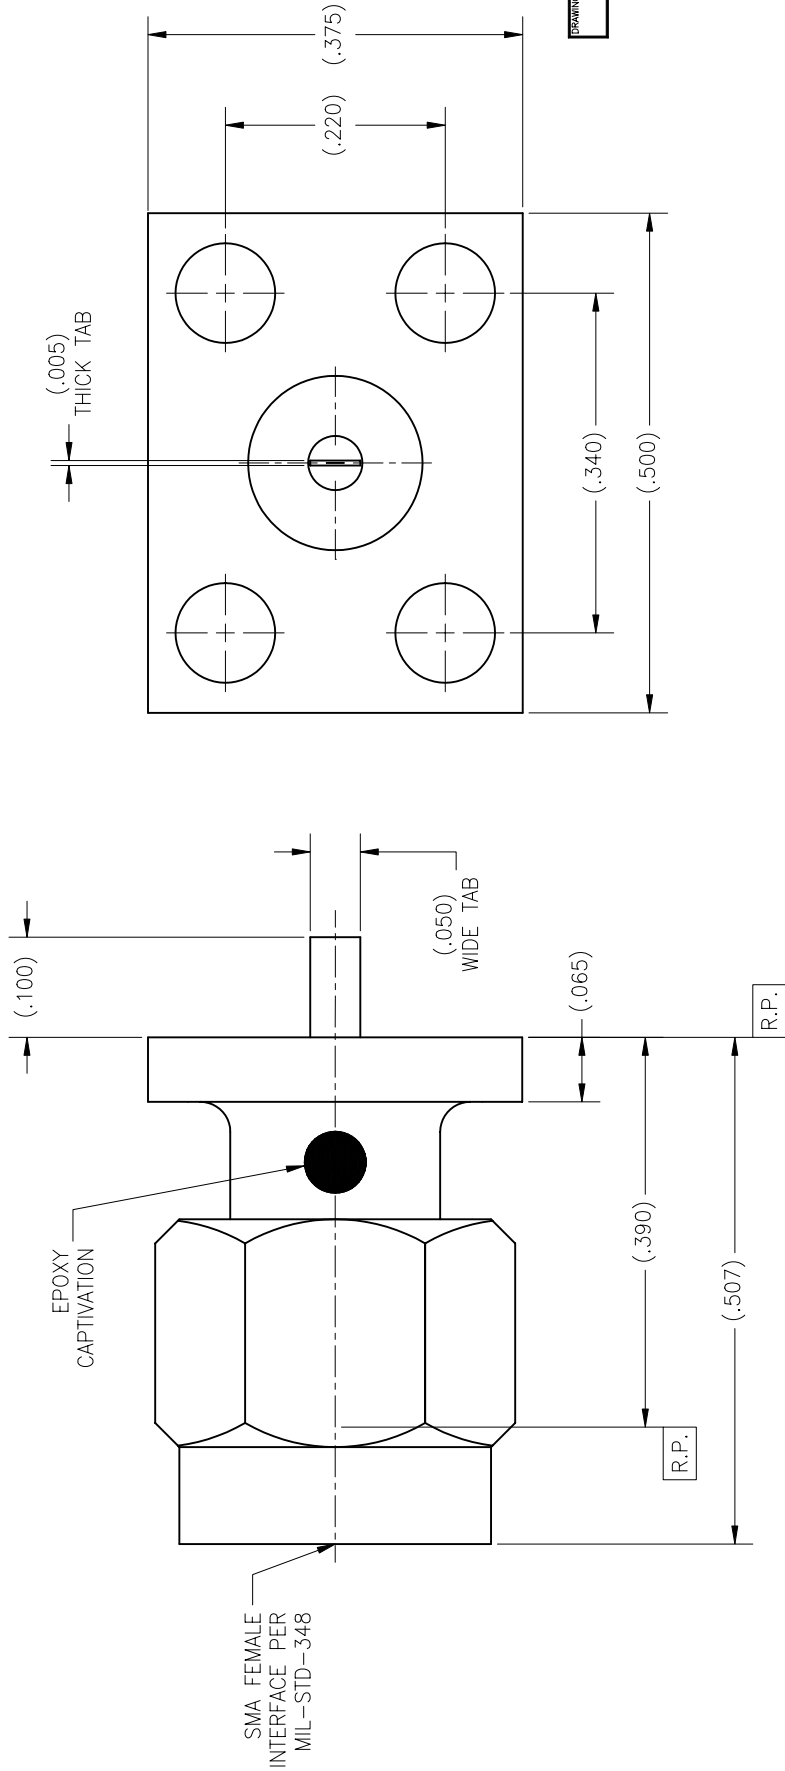

NOTES(S):

- MATERIAL(S):
 - BODY: 303 SST PER ASTM A-582.
 - CENTER CONDUCTOR & RETAINING RING: BeCu ALLOY C173 PER ASTM B-196.
 - GASKET: SILICONE RUBBER PER ZZ-R-765.
 - INSULATOR: TEFLON PER ASTM D-1710.
 - EPOXY: (FOR CC's & CCSF's) SIGMA VF TYPE HV
- FINISH(ES):
 - BODY & COUPLING NUT:
(FOR SF's & CCSF's) PASSIVATED PER ASTM A-967.
(FOR BASIC's & CC's) GOLD PLATE PER ASTM B-488 OVER NICKEL PLATE PER AMS-QQ-N-290.
 - CENTER CONDUCTOR: GOLD PLATE PER ASTM B-488 OVER NICKEL PLATE PER AMS-QQ-N-290.
 - INSULATOR, GASKET, RETAINING RING & EPOXY: NONE

2.1 BODY & COUPLING NUT:

(FOR SF's & CCSF's) PASSIVATED PER ASTM A-967.

(FOR BASIC's & CC's) GOLD PLATE PER ASTM B-488 OVER NICKEL PLATE PER AMS-QQ-N-290.

2.2 CENTER CONDUCTOR: GOLD PLATE PER ASTM B-488 OVER

NICKEL PLATE PER AMS-QQ-N-290.

2.3 INSULATOR, GASKET, RETAINING RING & EPOXY: NONE

TOLERANCES AND NOTES

EXCEPT AS NOTED

DIMENSIONS ARE IN INCHES

LINEAR .XX ±.015 ANGULAR ± 1/2°

FRACTION .XX ±.005

1. MACHINE FINISH

2. BREAK ALL SHARP EDGES .003 MAX.

3. MACHINED FILLETS .005 MAX.

4. MACHINED SURFACES SQUARE TO RESPECTIVE

AXIS WITHIN .005 INCHES PER INCH

5. .002 TYP. TO BE USED FOR ALL DIMENSIONS CONCERNING PLATING.

6. DIMENSIONS TO BE USED FOR ALL DIMENSIONS CONCERNING PLATING.

7. DIMENSIONS TO BE USED FOR ALL DIMENSIONS CONCERNING PLATING.

8. THREADS PER H-28

9. REMOVE ALL BURRS

10. REMOVE ALL BURRS

NOTICE

THIS DRAWING IS THE PROPERTY OF TENSOLITE, INC. IT IS TO BE USED FOR THE DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALE OF THE PRODUCT DESCRIBED HEREIN. NO PART OF THIS DRAWING IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF TENSOLITE, INC.

RESERVED BY TENSOLITE COMPANY, LONG BEACH, CALIFORNIA 90815.

SEE NOTE(S)		—		SEE NOTE(S)		—	
MATERIAL		SIZE		SPECIFICATION		PROCUREMENT	
Tensolite				HIGH PERFORMANCE CABLES & INTERCONNECT SYSTEMS		Lot's Beach, California 90815	
APPROVAL INITIALS		DATE		TITLE		SMA FEMALE 4 HOLE (.375 X .500)	
DRAWN BY		R.C.		03.26.02		FLANGE MOUNT TO VERTICAL TAB TERMINATION	
CHECKED		A.G.S.		08.02.02		SCALE	
QUALITY						SUB-DIRECTORY/NAME	
ENGINEERING		A.G.S.		08.02.02		10/1 OL	
CAGE CODE		C 30990		DRAWING NO.		SHEET 1 OF 1	
SIZE		5706		REV.		—	