

7/16 F/F Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz,  
1000W, IP67, 60 V Max., 25mJ, 40kA, Filter, Low PIM



## TSXDC-DFF

### Features

- Surge current of 40kA
- Max Power 1000W
- Frequency range from 698 MHz to 2700 GHz
- Waterproof IP67 rated
- 7/16 DIN female connectors
- DC Pass
- Low PIM
- VSWR <1.2:1
- Low insertion loss
- CE & RoHS compliant

### Applications

- Cellular communication systems
- Public safety systems
- Emergency response systems
- Industrial

### Description

RF surge protector (also known as lightning arrester) TSXDC-DFF from PolyPhaser utilizing a patented spiral inductor design enables an almost instantaneous response to a lightning surge to protect critical hardware while maintaining the RF performance. This RF surge protector component is manufactured in a coaxial in-line design with wide operating frequency range. All PolyPhaser RF surge protector products are available in stock with same day shipping.

### Electrical Specifications

Surge Protector Type DC Handling		Surge Filter DC Pass		
Description	Minimum	Typical	Maximum	Units
Frequency Range	0.698		2.7	GHz
Impedance		50		Ohms
VSWR			1.2:1	
Insertion Loss			0.1	dB
Passive Intermodulation		-125	-155	dBc
Operating Voltage (DC)			60	Volts
Operating Current (DC)			6	A
Resistance (DC)			20	mOhms
Input Power, CW @ 920 MHz			1	kWatts
Surge Current IEC 61000-4-5 8/20μs WAVEFORM		20	40	kA
Throughput Voltage			500	Volts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[7/16 F/F Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, 1000W, IP67, 60 V Max., 25mJ, 40kA, Filter, Low PIM TSXDC-DFF](#)

7/16 F/F Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz,  
1000W, IP67, 60 V Max., 25mJ, 40kA, Filter, Low PIM



## TSXDC-DFF

<500V 2kA IEC 61000-4-5 8/20μs WAVEFORM

Throughput Energy	25	mJ
FOR 2kA IEC 61000-4-5 8/20μs WAVEFORM		

### Mechanical Specifications

#### Size

Length	3.5 in [88.9 mm]
Width/Diameter	1.73 in [43.94 mm]
Height	1.94 in [49.28 mm]
Weight	1 lbs [453.59 g]

#### Configuration

Input Connector	7/16 DIN Female
Output Connector	7/16 DIN Female

### Environmental Specifications

#### Temperature

Operating Range	-50 to +85 deg C
-----------------	------------------

Ingress Protection (IP) Rating

IP67

Humidity

95%, Non-condensing, 100% External

### Compliance Certifications

RoHS

CE

### Plotted and Other Data

Notes:


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[7/16 F/F Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, 1000W, IP67, 60 V Max., 25mJ, 40kA, Filter, Low PIM TSXDC-DFF](#)

7/16 F/F Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz,  
1000W, IP67, 60 V Max., 25mJ, 40kA, Filter, Low PIM



## TSXDC-DFF

### Typical Performance Data

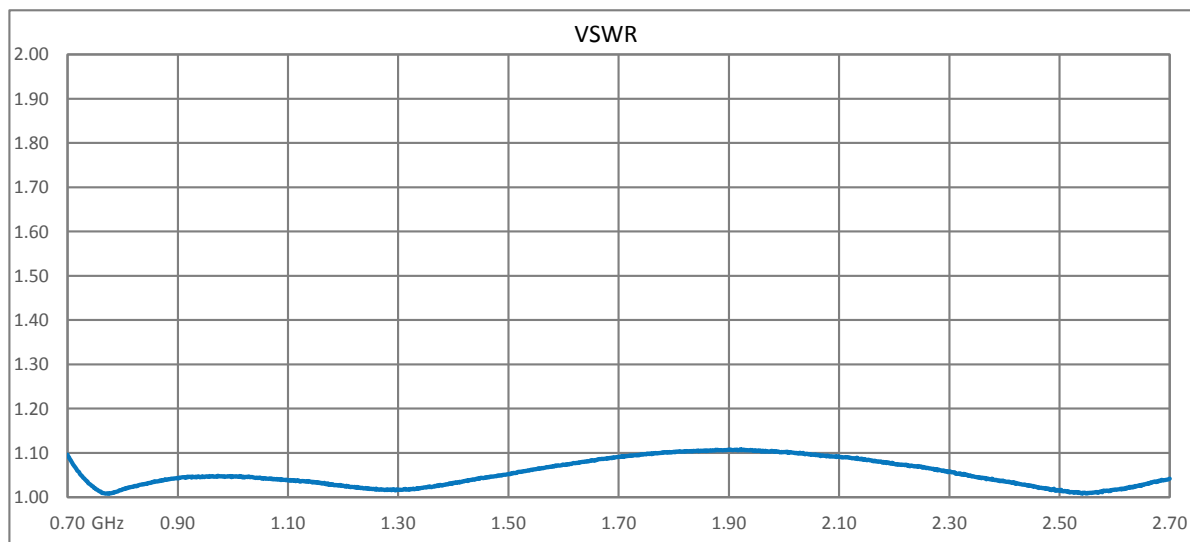


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[7/16 F/F Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, 1000W, IP67, 60 V Max., 25mJ, 40kA, Filter, Low PIM TSXDC-DFF](#)

7/16 F/F Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz,  
1000W, IP67, 60 V Max., 25mJ, 40kA, Filter, Low PIM



## TSXDC-DFF

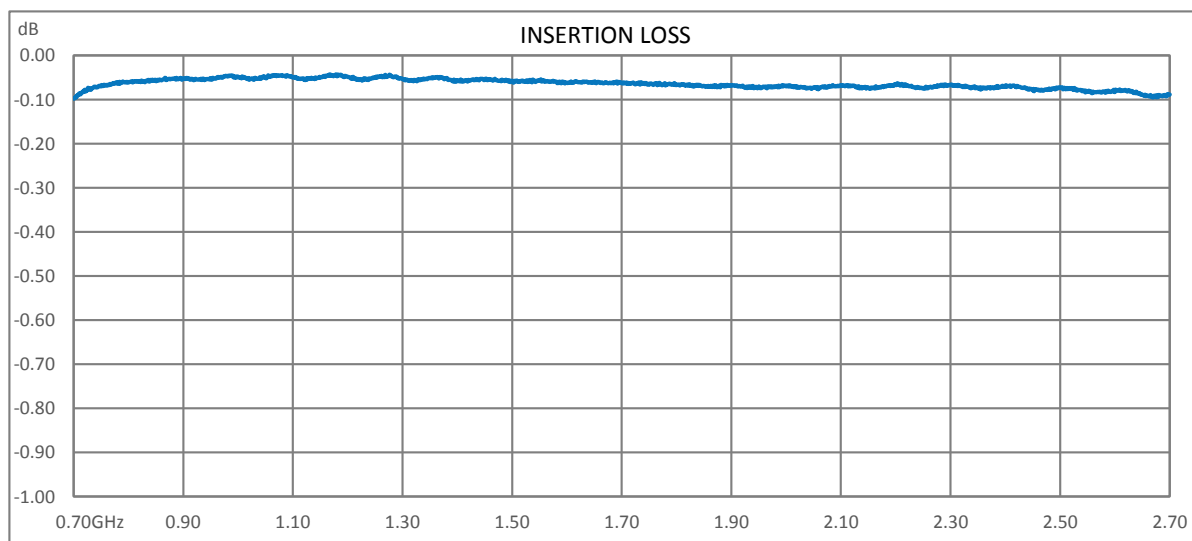

PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 F/F Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, 1000W, IP67, 60 V Max., 25mJ, 40kA, Filter, Low PIM TSXDC-DFF](https://www.polyphaser.com/7-16-surge-protector-2.7ghz-filter-tsxdc-dff-p.aspx)

URL: <https://www.polyphaser.com/7-16-surge-protector-2.7ghz-filter-tsxdc-dff-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

7/16 F/F Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz,  
1000W, IP67, 60 V Max., 25mJ, 40kA, Filter, Low PIM

TSXDC-DFF CAD Drawing

