




[+ HARNESSING](#)

HEAT SHRINK BOOTS

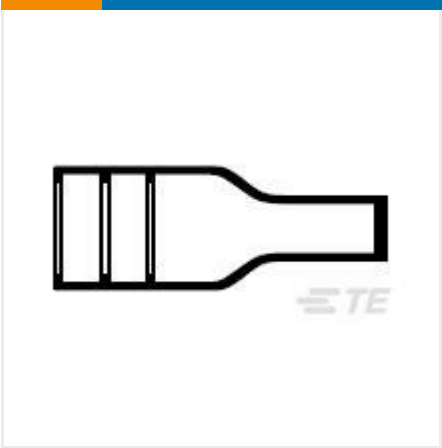

✓ Active

TE CONNECTIVITY (TE)
202D132-3-0
[Raychem](#)

202D132-3-0
TE Internal Number: 808030N001
Alias ID: 3-1196267-7

[EU RoHS Compliant](#)
[EU ELV Compliant](#)
Molded Part Shape Straight
Lipped Yes

Operating Temperature Range (°C) -55 – 135
Adhesive Options S1006 Separate Adhesive, -55°C to +135°C (-67°F to + 275°F)
Material Systems Code 10

[↓](#) **PRODUCT DRAWING**
[English](#)

DOCUMENTATION

Product Drawings

Boot, Straight, With Lips
PDF
English

Product Environmental Compliance
Safety Data Sheet

Thermofit Heat-Shrinkable Polymeric Products
PDF
English

Thermofit Heat-Shrinkable Polymeric Products
PDF
Danish

Thermofit Heat-Shrinkable Polymeric Products

PDF

Dutch

Thermofit Heat-Shrinkable Polymeric Products

PDF

English

Thermofit Heat-Shrinkable Polymeric Products

PDF

French

Thermofit Heat-Shrinkable Polymeric Products

PDF

German

Thermofit Heat-Shrinkable Polymeric Products

PDF

Italian

Thermofit Heat-Shrinkable Polymeric Products

PDF

Norwegian

Thermofit Heat-Shrinkable Polymeric Products

PDF

Spanish

Thermofit Heat-Shrinkable Polymeric Products

PDF

Swedish

Thermofit Heat-Shrinkable Polymeric Products

PDF

Spanish

Thermofit Heat-Shrinkable Polymeric Products

PDF

English

Thermofit Heat-Shrinkable Polymeric Products

PDF

English

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Molded Part Shape Straight

Molded Part Type Molded Boot

Configuration Features

Lipped Yes

Body Features

Material Systems Code 10
Adhesive Pre-Coat No

Dimensions

Wire/Cable Outside Diameter .31 in, 8 mm
Connector or Backshell Outside Diameter .63 in, 16 mm

Usage Conditions

Operating Temperature Range (°C) -55 – 135

Operation/Application

Power Cable Accessory No

Industry Standards

Approved Standards DEF Std 59-97 Issue 3 Type DA

Other

Adhesive Options S1006 Separate Adhesive, -55°C to +135°C (-67°F to + 275°F)
Adhesive Type Adhesive Purchased Separately

Statement of Compliance

Statement of Compliance
PDF