

4112-9212 This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary



3 GHz SMA LATCHING S.P.9 T. SWITCH

Page
1 / 2

OPTIONS : INDICATOR /SELF CUT-OFF /AUTO RESET / TTL DRIVE /SUPP.DIODES

R F CHARACTERISTICS

NUMBER OF WAYS : 9
FREQUENCY RANGE : 0 - 3 GHz
IMPEDANCE : 50 Ohms

FREQUENCY (GHz)	0 - 3
V.S.W.R <=	1.20
INSERT. LOSS <=	0.20 dB
ISOLATION >=	80 dB
AVER. POWER (*)	240 W

ELECTRICAL CHARACTERISTICS

ACTUATOR : LATCHING
NOMINAL CURRENT AT 25°C (±10%) : 500 mA
ACTUATOR VOLTAGE (Vcc) : 28V (24 to 30V) / NEGATIVE COMMON
TERMINALS : 25 pins D-SUB male connector
INDICATOR RATING : 1 W / 30 V / 100 mA
SELF CUT-OFF TIME : 40 ms < CT < 120 ms
TTL INPUTS (E) - High level : 2.2 to 5.5V / 800µA at 5V
- Low level : 0 to 0.8V / 20µA at 0.8V



MECHANICAL CHARACTERISTICS

CONNECTORS : SMA female per MIL-C 39012
LIFE : 2.000.000 cycles per position
SWITCHING TIME (nominal voltage;25°C) : < 50 ms
CONSTRUCTION : splashproof
WEIGHT : < 360 g

ENVIRONMENTAL CHARACTERISTICS


OPERATING TEMPERATURE RANGE (°C) : -40 , +85
STORAGE TEMPERATURE RANGE (°C) : -55 , +85

(* : average power at 25°C per RF path)

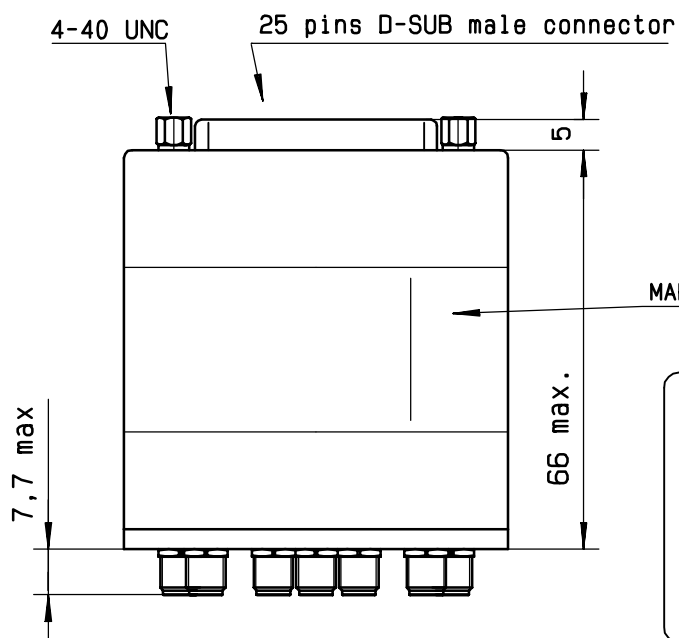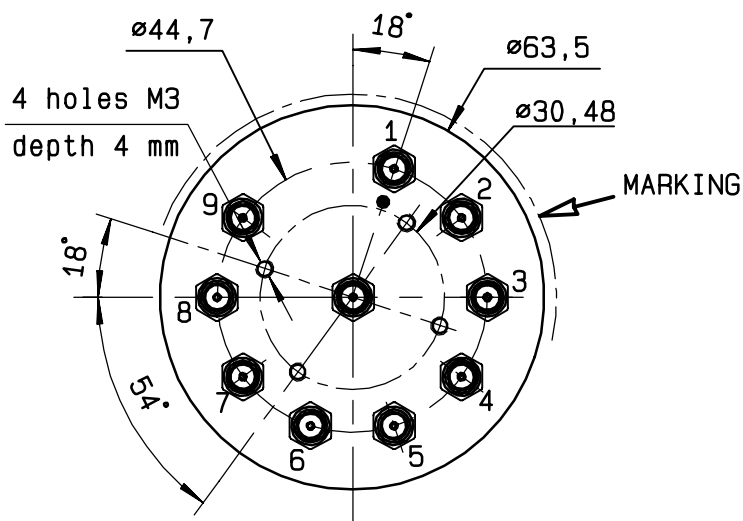

TTL input	RF continuity	Ind.
E1 = 1	IN $\leftrightarrow$ 1	D.E
E2 = 1	IN $\leftrightarrow$ 2	D.F
E3 = 1	IN $\leftrightarrow$ 3	D.G
E4 = 1	IN $\leftrightarrow$ 4	D.H
E5 = 1	IN $\leftrightarrow$ 5	D.I
E6 = 1	IN $\leftrightarrow$ 6	D.J
E7 = 1	IN $\leftrightarrow$ 7	D.K
E8 = 1	IN $\leftrightarrow$ 8	D.L
E9 = 1	IN $\leftrightarrow$ 9	D.M

MARKING TOP VIEW (TERMINALS)

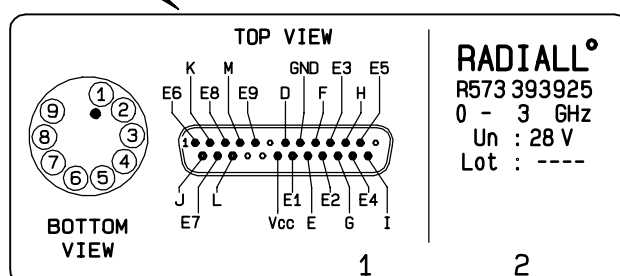**SCHEMATIC DIAGRAM**